

LOC/DME I-JAC 109.1 Chan 28	APP CRS 187°	Rwy Ldg 6300 TDZE 6451 Apt Elev 6451
---	------------------------	---

ILS Y or LOC Y RWY 19
JACKSON HOLE (JAC)

RADAR required for procedure entry at MOSSS.

 Circling NA for Cats A, B and C east of Rwy 1-19. Circling NA for
 Cat D. For inop ALS, increase SOSUE fix minimums S-LOC 19 Cats
 -21°C C and D visibility to 2½ SM. For inop ALS, increase S-LOC Cat
C and D visibility to 3 SM.



MALS



MISSED APPROACH: Climb to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.

D-ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER ★ 118.075 (CTAF) 0	GND CON 124.55	UNICOM 122.95
-------------------	----------------------------------	-------------------------------------	-------------------	------------------

MISSED APCH FIX

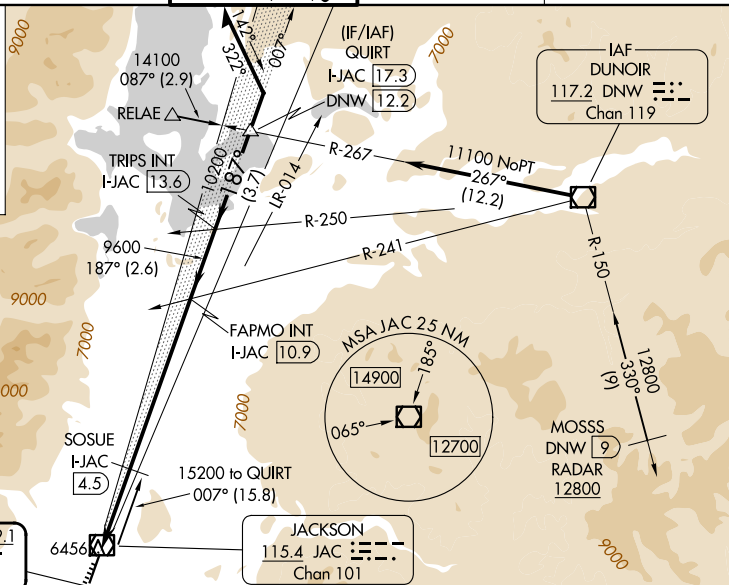

LOCALIZER 109.1
I-JAC
Chan 28

Use I-JAC DME when on the localizer course.

Remain
within 10 NM

JACKSON HOLE (JAC)
ILS Y or LOC Y RWY 19