

WAAS CH 81809 W22A	APP CRS 223°	Rwy Ldg TDZE Apt Elev	8001 598 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Lincoln altimeter setting; increase LPV DA to 942 feet and all visibilities $\frac{1}{2}$ SM, LNAV/VNAV DA to 1108 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to $\frac{1}{2}$ SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to 1 SM, increase LNAV/VNAV all Cats visibility to 1 $\frac{1}{2}$ SM.

MALSR


MISSED APPROACH:
Climb to 2700 direct
COVAC and hold.

ATIS
127.65 270.1


SAINT LOUIS APP CON ★
126.15 323.0

SPRINGFIELD TOWER ★
121.3 (CTAF) **L** 257.8

GND CON	
121.9	348.6

UNICOM
122.95


Procedure NA for arrivals at LOTTO via V129 northbound.

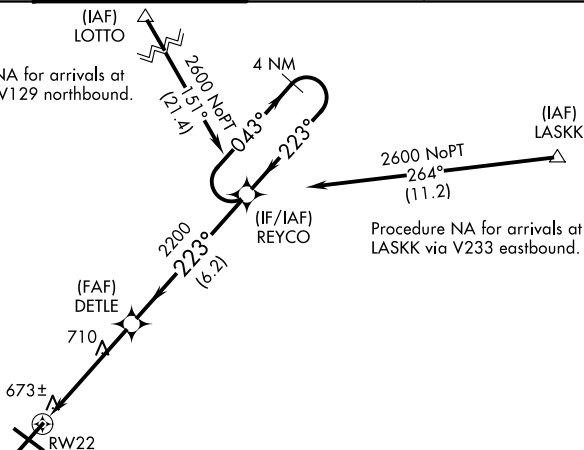

MISSED APCH FIX
COVAC



ELEV 598		TDZE 598
----------	---	----------

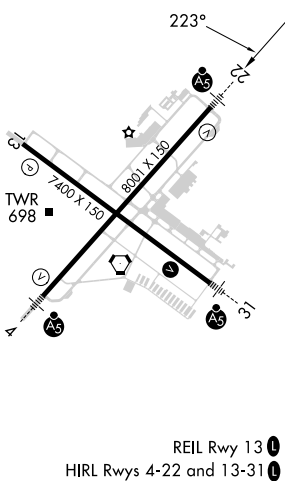

REIL Rwy 13 L

HIRL Rwy 4-22 and 13-31 **L**