


VORTAC SPI	APP CRS	Rwy Ldg	8001
112.7	215°	TDZE	598
Chan 74		Apt Elev	598

VOR RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

DME required.		MALS R	MISSED APPROACH: Climb to 2400 on SPI VORTAC R-215 then right turn direct SPI VORTAC and hold.
ASR	VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting: increase all MDA 60 feet and S-22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-22 Cat C/D visibility to 1 ¾ SM. For inop ALS when using AAA altimeter setting, increase S-22 Cat C/D visibility to 1 ¾ SM.		

ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

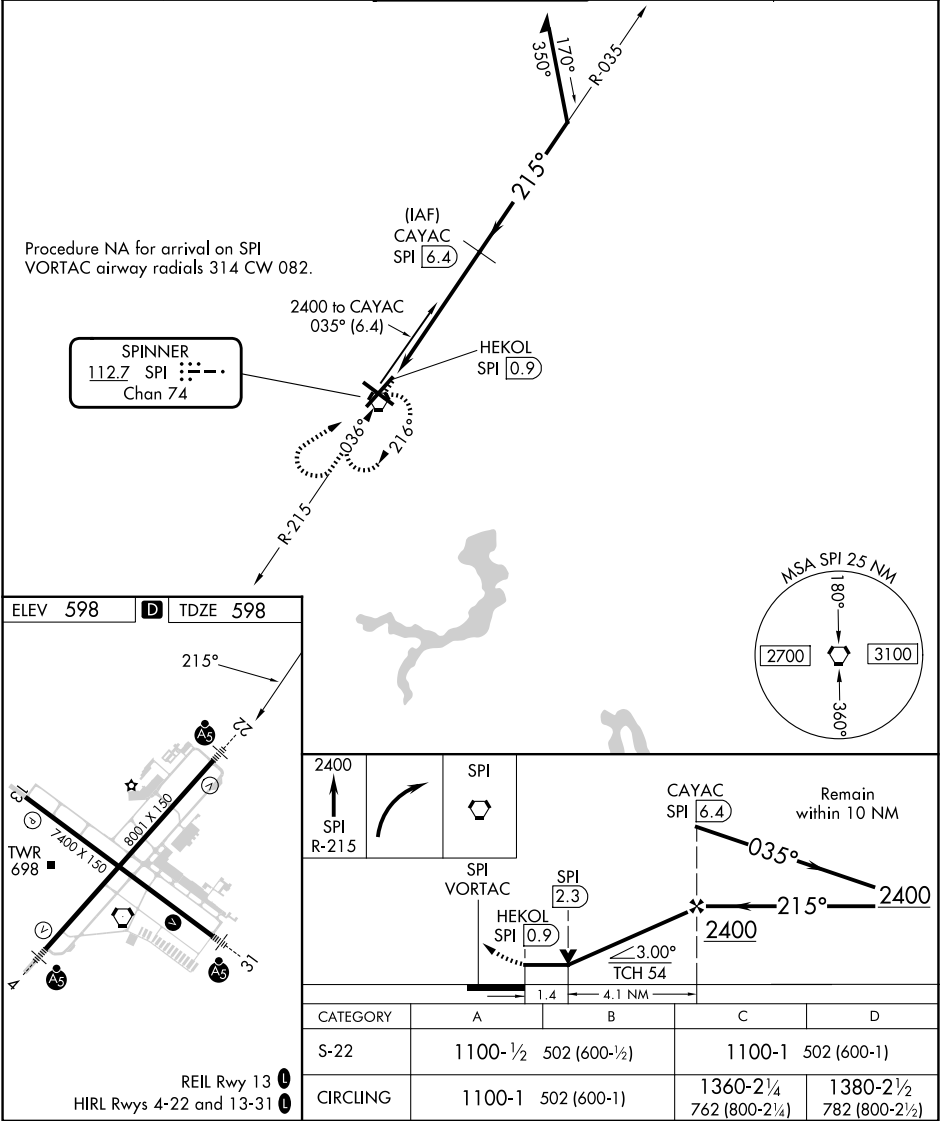

VOR RWY 22