


LOC/DME I-TQW 111.3 Chan 50	APP CRS 325°	Rwy Ldg 7466 TDZE 1124 Apt Elev 1203
---	------------------------	---



ILS or LOC RWY 32
PITTSBURGH INTL (PIT)

▼ DME or RADAR required. Inop table does not apply to S-ILS 32. For inop ALS, increase S-LOC 32 Cat E visibility to ¾ SM and ZANTA fix minimums S-LOC 32 Cat E visibility to RVR 6000.	MALS 	MISSED APPROACH: Climb to 1800 then climbing right turn to 4000 direct EWC VOR/DME and hold.
--	----------	--

D-ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
---	---	--	---	---------------------------------

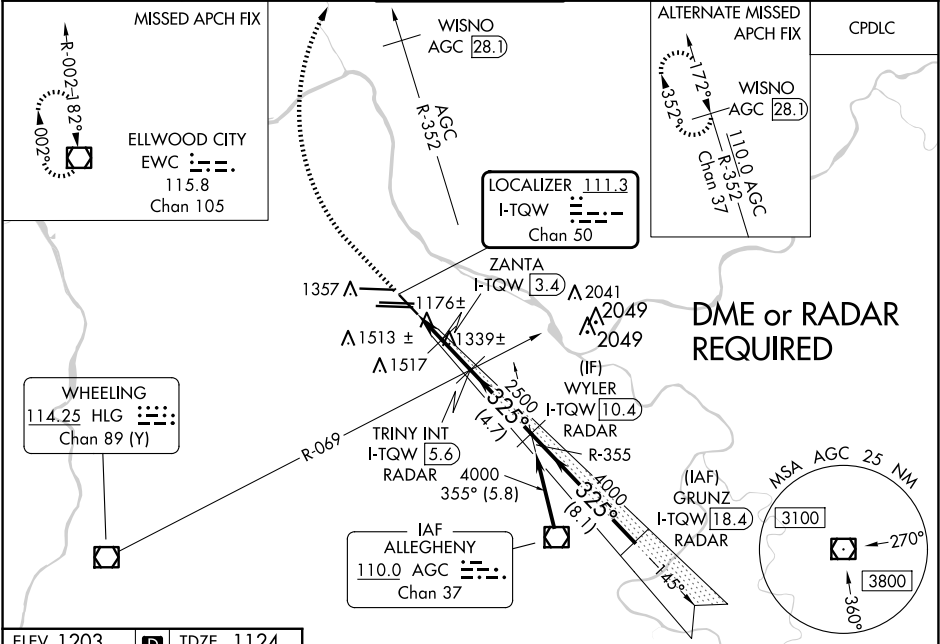

ELEV 1203	D	TDZE 1124
------------------	----------	------------------

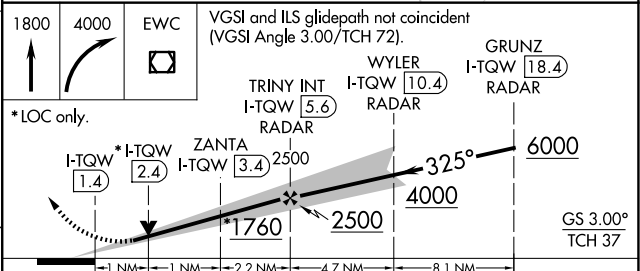

CATEGORY	A	B	C	D	E
S-ILS 32	1324/40 200 (200-¾)				
S-LOC 32	1760/40	636 (600-¾)	1760-1½	636 (600-1½)	
CIRCLING	1760-1	557 (600-1)	1880-2 677 (700-2)	1880-2¼ 677 (700-2¼)	1880-2½ 677 (700-2½)
ZANTA FIX MINIMUMS (DME REQUIRED)					
S-LOC 32	1520/40	396 (400-¾)	1520/45	396 (400-¾)	
CIRCLING	1700-1	497 (500-1)	1880-2 677 (700-2)	1880-2¼ 677 (700-2¼)	1880-2½ 677 (700-2½)