

APP CRS	Rwy Ldg	11492
101°	TDZE	1135
	Apt Elev	1203

RNAV (RNP) Z RWY 10R
PITTSBURGH INTL (PIT)

RNP AR APCH - GPS. Authorization required.

T For uncompensated baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase RNP 0.14 all Cats visibility to RVR 5500, and RNP 0.30 all Cats visibility to 1% SM. Simultaneous approach authorized.

ALSF-2



MISSED APPROACH: Climb to 4000 on track 101° to KADEC and on track 143° to JAPAV and on track 198° to GUZIT and hold.

D-ATIS
ARR **127.**
DEP **135.**


PITTSBURGH APP CON
123.95 360.8

PITTSBURGH TOWER
128.3 291.7


	GND	CON
SOUTH	121.9	348.6
NORTH	127.8	348.6

CLNC DEL
126.75 353.7

CPD/C

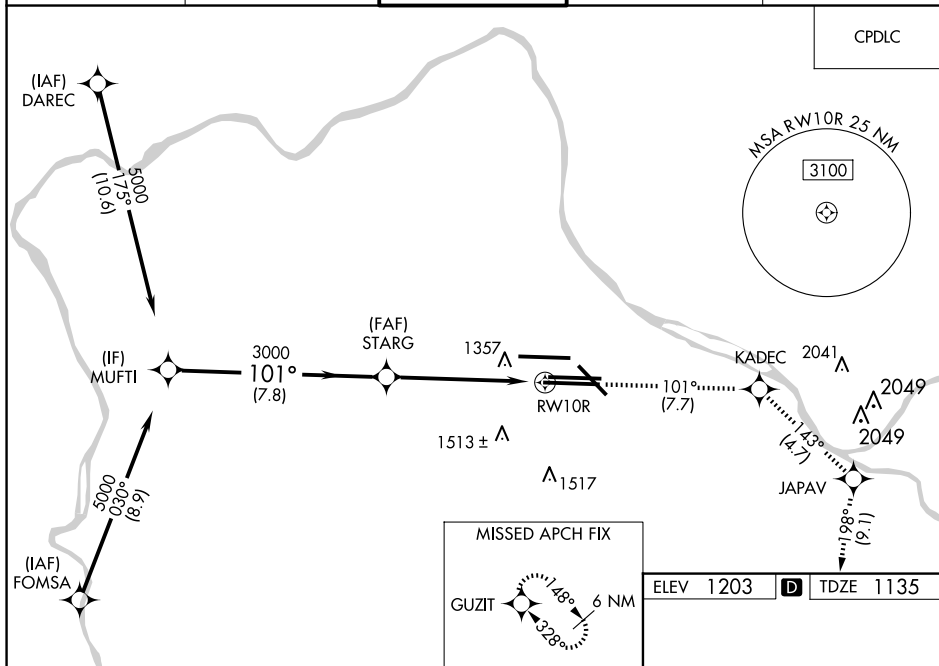

ELEV	1203	D	TDZE	1135
------	------	----------	------	------

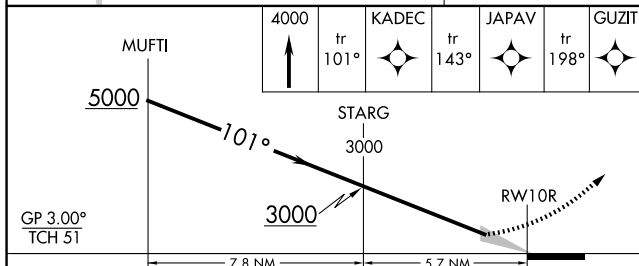

CATEGORY	A	B	C	D
RNP 0.14 DA		1511/35	376 (400-5%)	
RNP 0.20 DA		1572/40	437 (400-3%)	
RNP 0.30 DA		1697-1¼	562 (500-1¼)	

AUTHORIZATION REQUIRED

REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R,
28C, and 32