

WAAS
CH **72818**
W35A

APP CRS
354°

Rwy Ldg
TDZE
Apt Elev
5593
1067
1073

RNAV (GPS) RWY 35

SHAWNEE RGNL (SNL)



▼

▲

Baro-VNAV NA when using Seminole altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1357 feet; increase LNAV/VNAV DA to 1605 feet and visibility ¼ SM; increase all MDAs 40 feet and visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
FAVAN and hold.

AWOS-3PT 118.275	OKE CITY APP CON 120.45 288.325	UNICOM 122.7 (CTAF)
----------------------------	---	-------------------------------

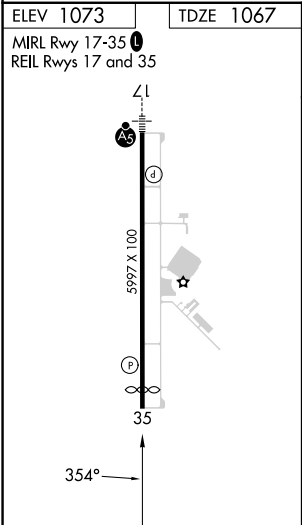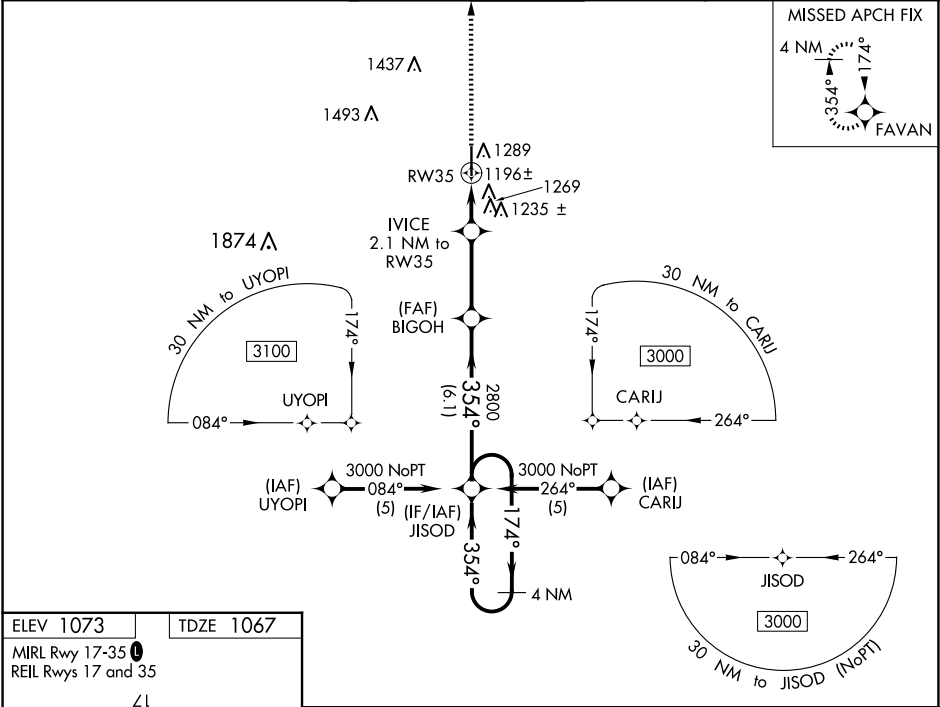

3000	FAVAN	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).	
*LNAV only.		4 NM Holding Pattern	
		JISOD	
		174°	
		354°	
		3000	
		GP 3.00°	
		TCH 47	
		2.1	
		3.1 NM	
		6.1 NM	
CATEGORY	A	B	C
LPV DA	1317-1	250 (300-1)	NA
LNAV/VNAV DA	1565-1¾	498 (500-1¾)	NA
LNAV MDA	1520-1	453 (500-1)	1520-1¼
			453 (500-1¼)
CIRCLING	1600-1	527 (600-1)	1640-1½
			567 (600-1½)