

LOC I-PIA 109.9	APP CRS 309°	Rwy Ldg 10104 TDZE 650 Apt Elev 661
---------------------------	------------------------	--

ILS or LOC RWY 31

GENERAL DOWNING - PEORIA INTL (PIA)

DME required for procedure entry.

▼


▲

When local altimeter setting not received, use AAA altimeter setting: increase S-ILS 31 DA to 939 feet; increase all MDAs 100 feet and S-LOC 31 visibility CAT C/D/E to 1¼ SM and Circling visibility Cat C¼ SM and Cat D½ SM. Circling Rwy 13, 31 NA at night. For inop ALS, when using AAA altimeter setting, increase S-ILS 31 all Cats visibility to RVR 4500, S-LOC 31 visibility Cats C/D/E to 1½ SM. For inop ALS, increase S-ILS 31 Cat E visibility to RVR 4000 and S-LOC 31 Cats C/D/E to 1½ SM. DME from PIA VORTAC. DME use requires simultaneous reception of I-PIA and PIA DME. * RVR 1800 authorized with the use of FD or AP or HUD to DA. (NA when using AAA altimeter setting).

MALSR

MISSED APPROACH: Climb to 2000 then climbing left turn to 2400 direct PIA VORTAC and hold, continue climb-in-hold to 2400.

ATIS 126.1 282.2	SAINT LOUIS APP CON 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6	CLNC DEL 124.675 317.55
----------------------------	---	-------------------------------------	--------------------------------	-----------------------------------

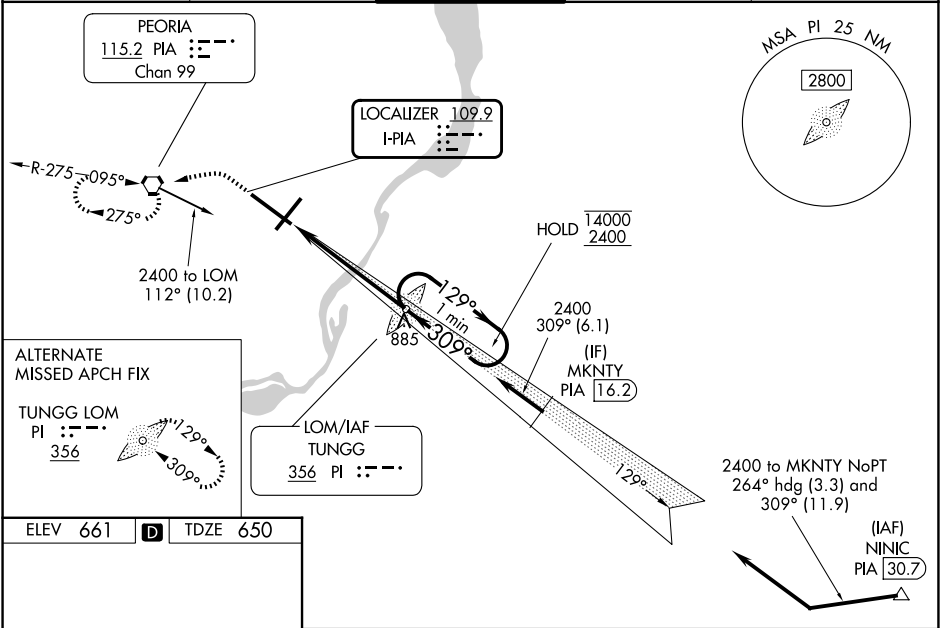

ELEV 661 D TDZE 650

HIRL Rwys 4-22 and 13-31
FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

1200	2400	PIA				
CATEGORY		A	B	C	D	E
S-ILS 31 *		850/24 200 (200-½)				
S-LOC 31		1120/24	470 (500-½)	1120/50 470 (500-1)		
CIRCLING		1160-1	499 (500-1)	1180-1½ 519 (600-½)	1400-2¼ 739 (800-2¼)	1680-3 1019 (1100-3)