

WAAS CH 61319 W11A	APP CRS 106°	Rwy Ldg TDZE Apt Elev	9800 3 3
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) Y RWY 11
LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000.




MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.

D-ATIS 127.55	NEW ORLEANS APP CON 125.5 350.35 (W) 133.15 290.3 (E)	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525
-------------------------	---	---	---------------------------------

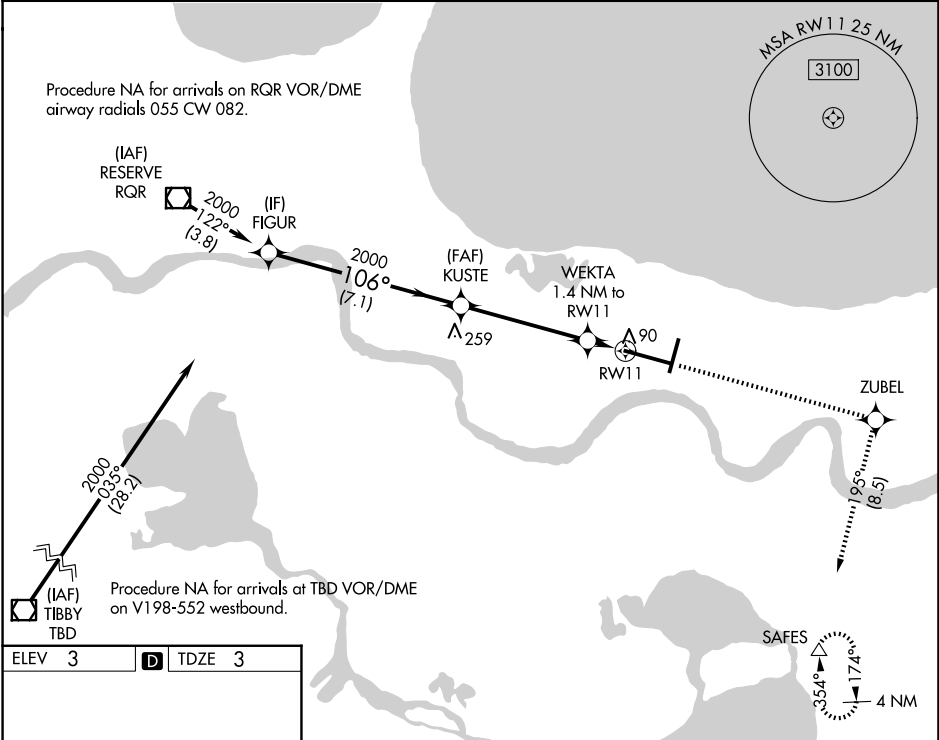

ELEV 3	D	TDZE 3
--------	----------	--------

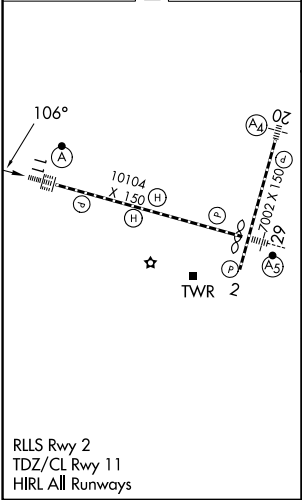

VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 73).				2000 ↑	ZUBEL ✦	tr 195°	SAFES △
FIGUR				KUSTE			
2000				2000	WEKTA 1.4 NM to RW11	RW11	
GP 3.00° TCH 55				2000	500		
106°				7.1 NM	4.7 NM	1.4 NM	
CATEGORY	A		B	C	D		
LPV DA	203/18 200 (200½)						
LNAV/ VNAV DA	253/24 250 (300½)						
LNAV MDA	340/24 337 (400½)			340/26 337 (400½)			
CIRCLING	520-1 517 (600-1)		540-1 537 (600-1)		580-1½ 577 (600½)		580-2 577 (600-2)