

LOC/DME I-HWY	APP CRS	Rwy Ldg
110.9	224°	8400
Chan 46	TDZE	12
	Apt Elev	13

ILS or LOC RWY 22L

JOHN F KENNEDY INTL (JFK)

RNAV 1-GPS or RADAR required for procedure entry.


From CIMBL, NRTON: RNAV 1-GPS required.

Simultaneous approach authorized.

ALSIF-2

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on JFK VOR/DME R-190 to CHANT INT/19 DME and hold.

D-ATIS (SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER	GND CON
115.4	117.7	128.725	119.1 281.55 (4R/22L and 13L/31R)	121.9 348.6
		128.125 269.0	123.9 281.55 (4L/22R and 13R/31L)	

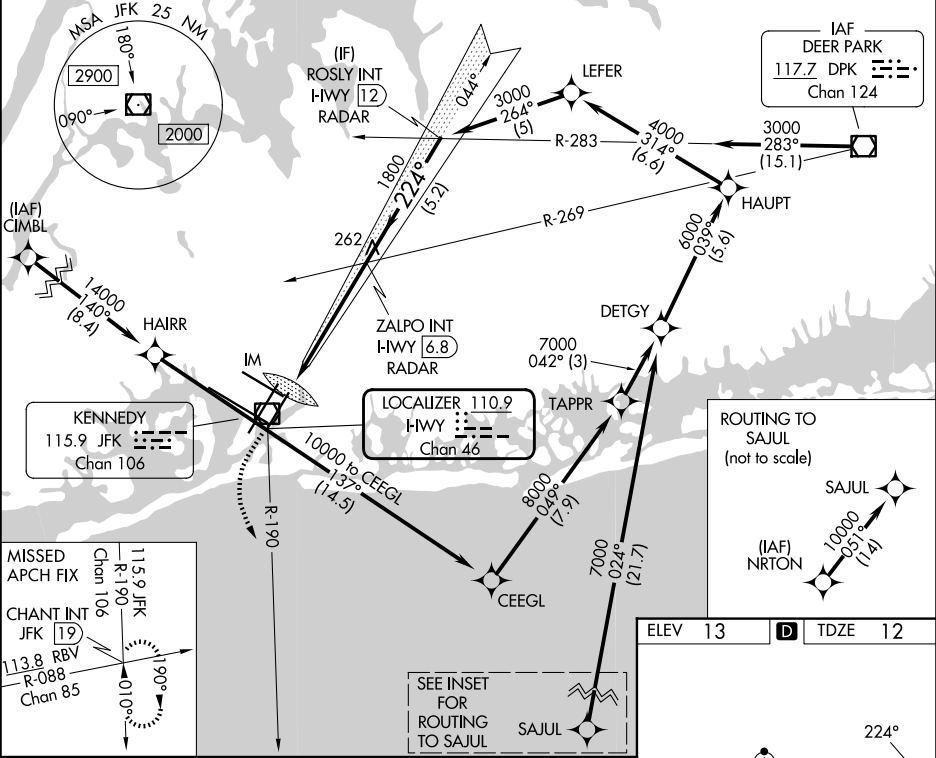

500	3000	CHANT INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 66).	ROSLY INT I-HWY 12 RADAR
JFK R-190			ZALPO INT I-HWY 6.8 RADAR	
*LOC only.	*I-HWY 1.4	*I-HWY 2.8	1800	3000
	0.2	1.2 NM	4.1 NM	5.2 NM
CATEGORY	A	B	C	D
S-ILS 22L		212/18	200 (200-1/2)	
S-LOC 22L	520/24	508 (600-1/2)	520/55	508 (600-1)
CIRCLING	640-1	627 (700-1)	680-1 3/4	680-2
			667 (700-1 3/4)	667 (700-2)

ELEV 13	TDZE 12
RLS Rwy 13L and 13R	
HIRL all Rwy	
TDZ/CL Rwy 4L, 4R, 13L, 22L and 31R	
FAF to MAP 5.5 NM	
Knots	60 90 120 150 180
Min:Sec	5:30 3:40 2:45 2:12 1:50