


LOC/DME I-RTH	APP CRS	Rwy Ldg
111.5	314°	8486
Chan 52		TDZE 13
		Apt Elev 13

ILS or LOC RWY 31R


JOHN F KENNEDY INTL (JFK)

RADAR required for procedure entry.	MALSR	MISSED APPROACH: Climb to 1800 then climbing left turn to 4000 on LGA VOR/DME R-207 to MOVFA INT/LGA 34.3 DME and hold.
Simultaneous approach authorized.		

(SW)	D-ATIS (NE)	NEW YORK APP CON	KENNEDY TOWER	GND CON
115.4	117.7 128.725	128.125 269.0	119.1 281.55 (4R/22L and 13L/31R) 123.9 281.55 (4L/22R and 13R/31L)	121.9 348.6

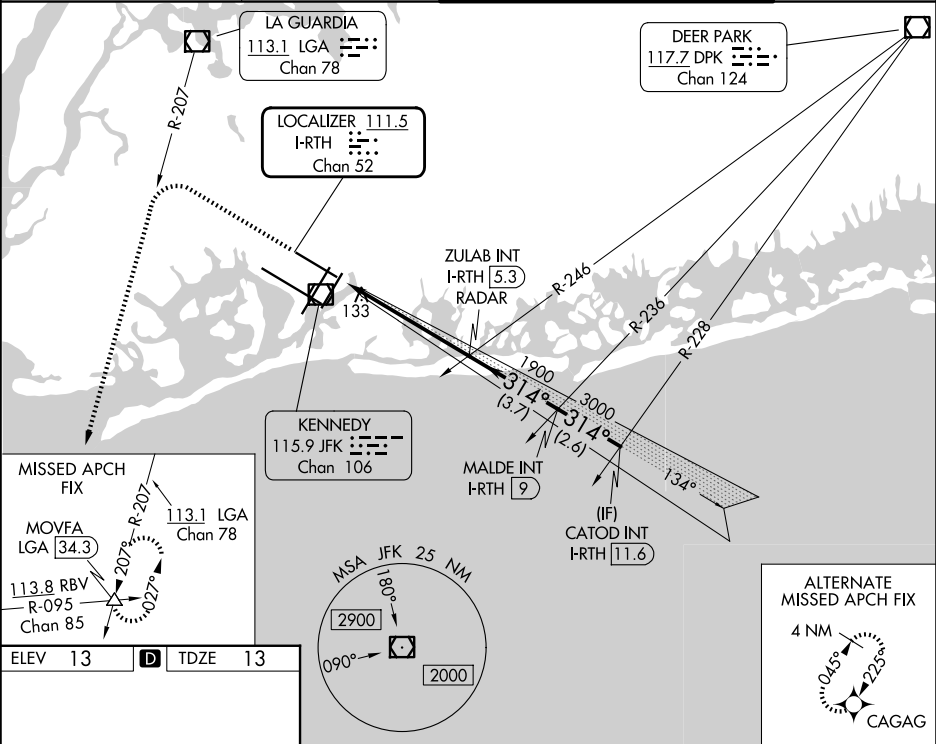

ELEV 13	D	TDZE 13
---------	---	---------



RLLS Rwy 13L and 13R					
HIRL all Rwy					
TDZ/CL Rwy 4L, 4R, 13L, 22L and 31R					
FAF to MAP 5.7 NM					
Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

1800	4000	LGA R-207	MOVFA △	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 54).	
* LOC only.					
		ZULAB INT I-RTH 5.3 RADAR	MALDE INT I-RTH 9	CATOD INT I-RTH 11.6	
		1900	3000	3000	
		I-RTH 0.4	I-RTH 0.8	GS 3.00° TCH 42	
		1.2	4.5 NM	3.7 NM	2.6 NM
CATEGORY	A	B	C	D	
S-ILS 31R	212/18 200 (200-½)				
S-LOC 31R	440/24	428 (500-½)	440/40	428 (500-¾)	
CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)	

NE-2, 27 NOV 2025 to 25 DEC 2025

NE-2, 27 NOV 2025 to 25 DEC 2025