

WAAS CH 45532 W24A	APP CRS 240°	Rwy Ldg TDZE 592 Apt Elev 592
--	------------------------	---

RNAV (GPS) Z RWY 24

NIAGARA FALLS INTL (IAG)

RNP APCH - GPS.


▼

▲

Rwy 24 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 6 NA at night.

MISSED APPROACH: Climb to 1400, then climbing left turn to 3600 direct ZUPUV and hold.
*Missed approach requires minimum climb of 265 feet per NM to 2120; if unable to meet climb gradient, see RNAV (GPS) Y Rwy 24.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	---	-------------------------------	-------------------------

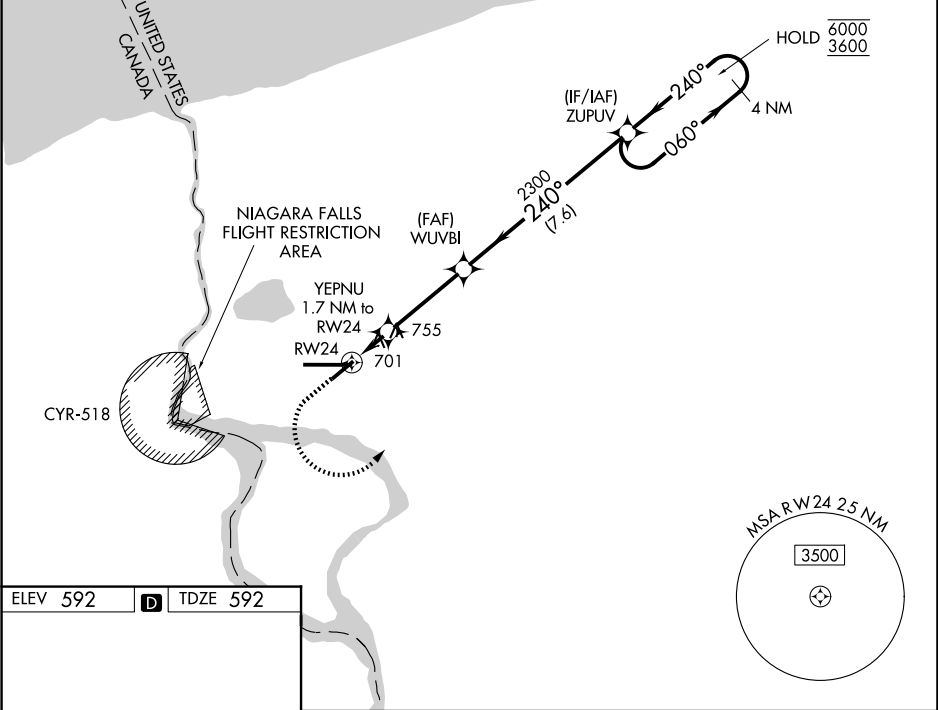

ELEV 592

D

TDZE 592

240°

1400

3600

ZUPUV

YEPNU 1.7 NM to RW24

1.1 NM to RW24

3.00° TCH 48

2300

1180

1.1 NM

0.6

3.5 NM

7.6 NM

4 NM Holding Pattern

ZUPUV

6000

3600

060°

240°

REIL Rws 6 and 24

TDZL/RCLS Rwy 28

RCLS Rwy 10

HIRL Rwy 10-28

MIRL Rws 6-24

CATEGORY	A	B	C	D
LP MDA	1000-1	408 (500-1)	1000-1½	408 (500-1½)
LNAV MDA	1020-1	428 (500-1)	1020-1¼	428 (500-1¼)
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)