

WAAS

CH **66099**

W31A

APP CRS

312°

Rwy Ldg

7700

TDZE

1679

Apt Elev

1716

RNAV (GPS) RWY 31

MINOT INTL (MOT)

RNP APCH.

V

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to RVR 4500.


MALSR

AS



|||||

MISSED APPROACH: Climb to 4500 direct DOYAB and hold.

ASOS 118.725	MINOT APP CON ★ 119.6 363.8	MAGIC CITY TOWER ★ 118.2 (CTAF) 0 251.125	GND CON 121.9	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

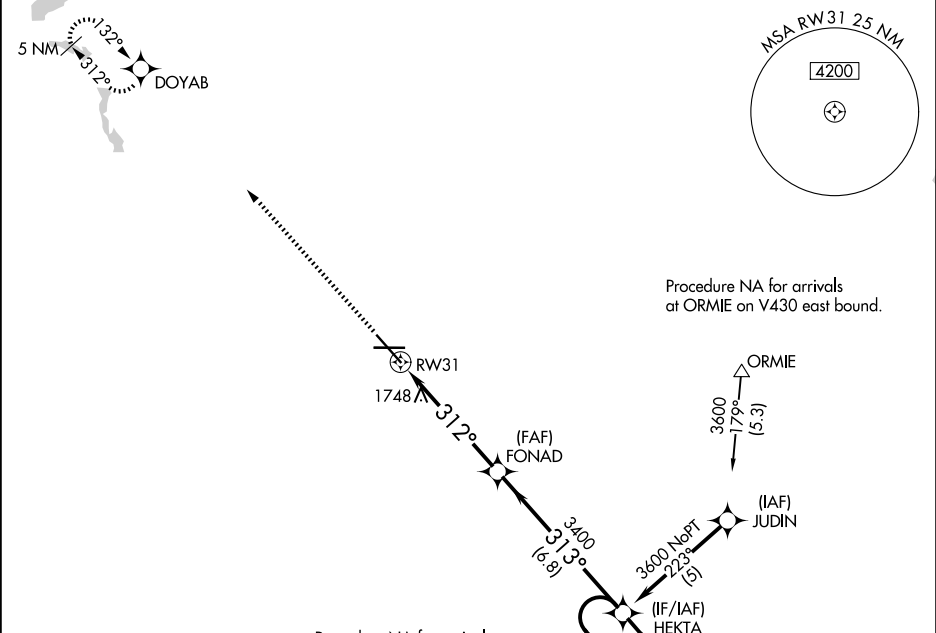

ELEV 1716	D	TDZE 1679
-----------	----------	-----------

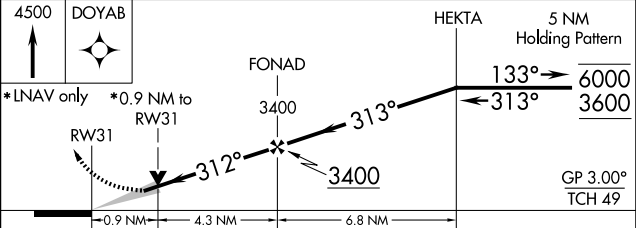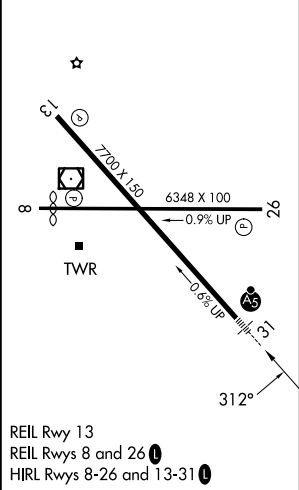

CATEGORY	A	B	C	D
LPV DA	1929/24 250 (300-½)			
LNAV/ VNAV DA	1966/24 287 (300-½)			
LNAV MDA	2000/24	321 (300-½)	2000/26	2000/50
			321 (300-½)	321 (300-1)
CIRCLING	2200-1	2240-1	2800-3 1084 (1100-3)	
	484 (500-1)	524 (600-1)		