

|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-RGO | APP CRS | Rwy Idg  | 7000 |
| 109.5     | 189°    | TDZE     | 1218 |
|           |         | Apt Elev | 1226 |



ILS or LOC RWY 19  
AKRON-CANTON RGNL (CAK)

**⚠** \*\* RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative ALS, increase CAT C/D visibility to RVR 6000. ZEVLO fix minimums: For inoperative ALS, increase Cat C/D visibility to RVR 5500.

**MALSR**

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.

|        |                     |                    |             |          |
|--------|---------------------|--------------------|-------------|----------|
| ATIS   | CLEVELAND APP CON * | AKRON-CANTON TOWER | GND CON     | CLNC DEL |
| 121.05 | 125.5 269.25        | 134.75 279.575     | 121.7 348.6 | 132.05   |

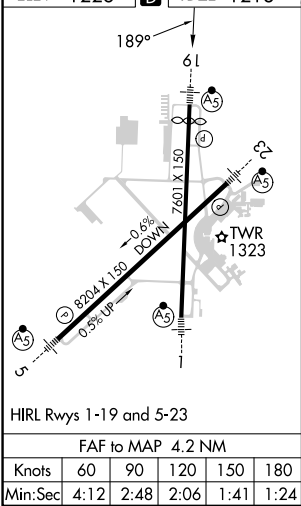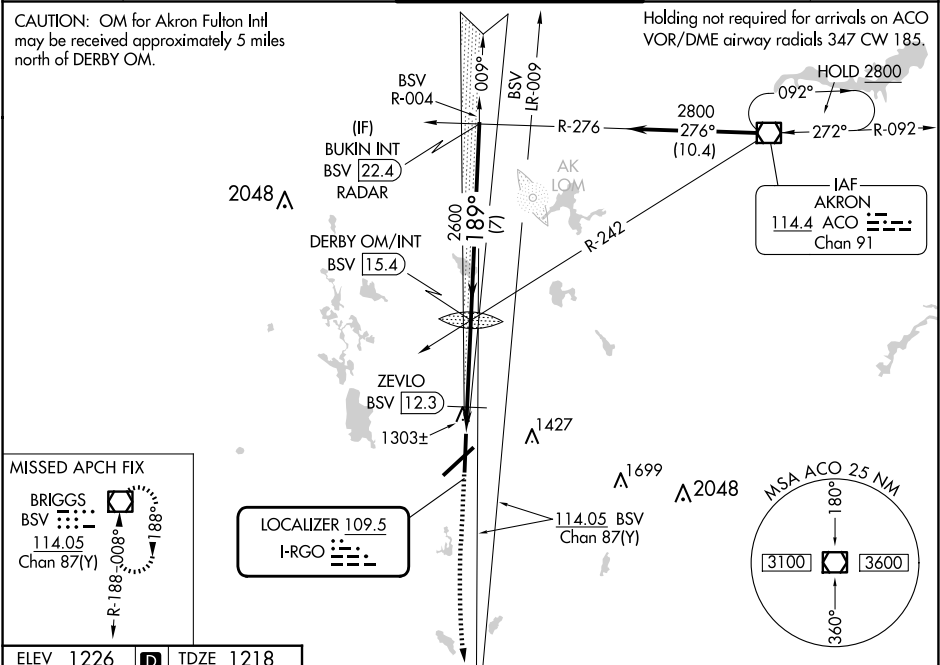

|                    |                       |             |                         |                         |                            |
|--------------------|-----------------------|-------------|-------------------------|-------------------------|----------------------------|
|                    | 1700                  | 3000        | BSV                     | DERBY OM/INT BSV [15.4] | BUKIN INT BSV [22.4] RADAR |
| *LOC only          |                       |             | ZEVLO BSV [12.3]        | 2597                    | 2800                       |
|                    |                       |             | BSV [11.1]              | 2600                    | 2700                       |
|                    |                       |             |                         | 1620                    |                            |
|                    |                       |             |                         | 1.1                     | 3.1 NM                     |
|                    |                       |             |                         |                         | 7 NM                       |
| CATEGORY           | A                     | B           | C                       | D                       |                            |
| S-ILS 19           | **1418/24 200 (200-½) |             |                         |                         |                            |
| S-LOC 19           | 1620/24               | 402 (400-½) | 1620/40                 | 402 (400-¾)             |                            |
| CIRCLING           | 1760-1                | 534 (600-1) | 1780-1½<br>554 (600-1½) | 1800-2<br>574 (600-2)   |                            |
| ZEVLO FIX MINIMUMS |                       |             |                         |                         |                            |
| S-LOC 19           | 1580/24               | 362 (400-½) | 1580/40<br>362 (400-¾)  |                         |                            |
| CIRCLING           | 1760-1                | 534 (600-1) | 1780-1½<br>554 (600-1½) | 1800-2<br>574 (600-2)   |                            |