
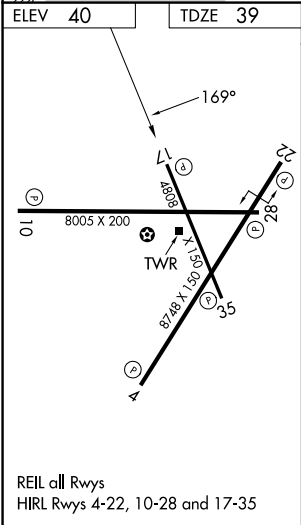


WAAS CH 69632 W17A	APP CRS 169°	Rwy Ldg TDZE Apt Elev	4808 39 40
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 17

Wallops Flight Facility (WAL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 372 and all Cats visibility ⅓ mile, increase LNAV/VNAV DA to 437 and all Cats visibility ¼ mile, increase all MDA 60 feet and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.		MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAGGO and hold.	
ASOS 119.175	PATUXENT APP CON★ 127.95 314.0	Wallops Tower★ 126.5 (CTAF) 306.975 (CTAF)	GND CON 127.875 269.325

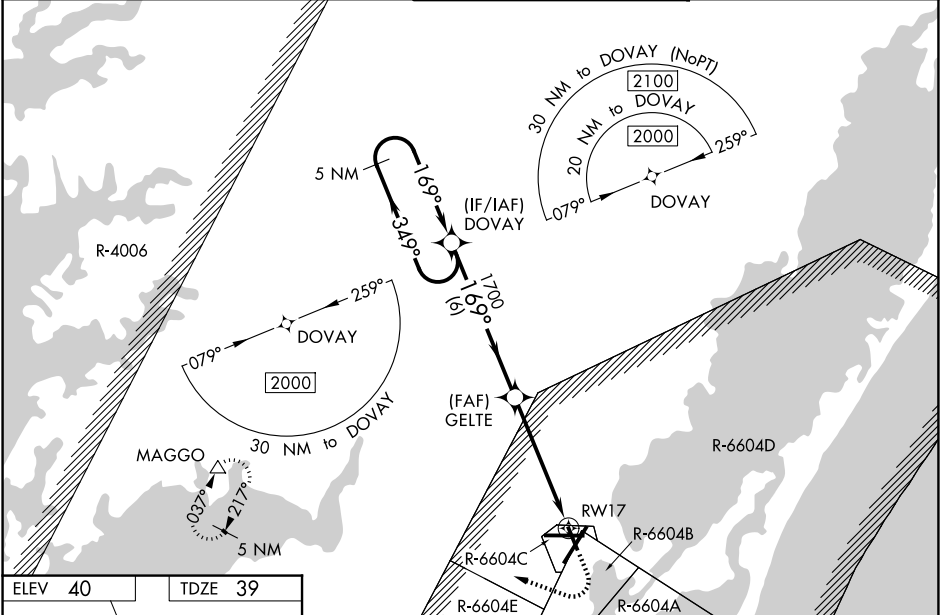

5 NM Holding Pattern		DOVAY	600	2000	MAGGO
GP 3.00° TCH 55		DOVAY	GELTE	*1.3 NM to RW17	
2000		1700	1700	RW17	
GP 3.00° TCH 55		6 NM	3.8 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	322-1		283 (300-1)		
LNAV/VNAV DA	387-1½		348 (400-1½)		
LNAV MDA	500-1	461 (500-1)	500-1¾	461 (500-1¾)	
CIRCLING	600-1	560 (600-1)	620-1½	860-2¾	820 (900-2¾)