

LOC/DME I-SIC
111.55
Chan **52 (Y)**

APP CRS
186°

Rwy Ldg **11000**
TDZE **875**
Apt Elev **896**

ILS or LOC RWY 18C
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS.
RADAR required.

MALSR

MISSED APPROACH: Climb to 1300, then climb to 3000 direct ZIRKE and hold.



Simultaneous approach authorized.

D-ATIS
134.375

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

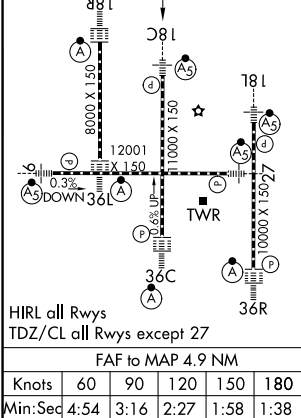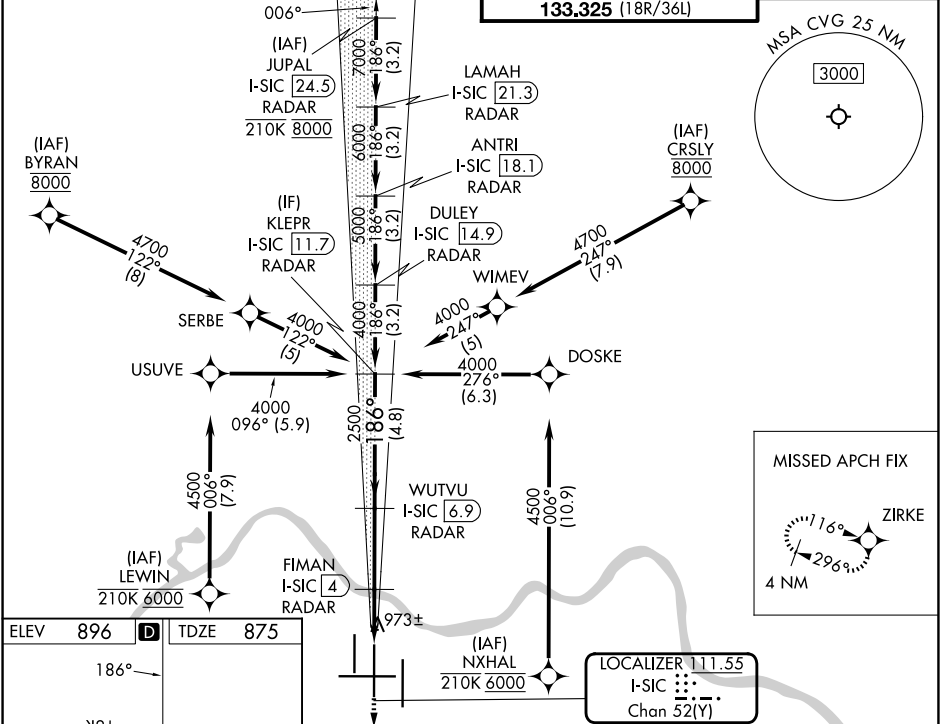

1300	3000	ZIRKE	VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 71).	
I-SIC [2]		I-SIC [3]	FIMAN I-SIC [4] RADAR	WUTVU I-SIC [6.9] RADAR
1560		2500	2500	4000
1 NM		1 NM	2.9 NM	4.8 NM
CATEGORY	A	B	C	D
S-ILS 18C	1075/18 200 (200-½)			
S-LOC 18C	1260/24 385 (400-½)		1260/35 385 (400-¾)	
CIRCLING	1460-1 564 (600-1)		1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)