

LOC/DME I-CJN

110.75

Chan **44** (Y)

APP CRS

186°

Rwy Ldg

8000

TDZE

868

Apt Elev

896

ILS or LOC RWY 18R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From BYRAN, CRSLY, GOSEC, FIBMO, LEWIN and NXHAL.

DME or RADAR required. RADAR required for procedure entry at WALBY.

For inop ALS, increase S-LOC 18R Cat C/D visibility to 1 3/8 SM. Simultaneous approach authorized with Rwy 18L/C. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 on heading 270° and FLM VOR/DME R-314 to JADRO/FLM 43.3 DME/RADAR and hold.

D-ATIS

134.375

CINCINNATI APP CON

119.7 363.15 (090°-269°)

123.875 363.15 (270°-089°)

CINCINNATI TOWER


118.975 360.85 (18L/36R)

118.3 (9/27, 18C/36C)

133.325 (18R/36L)

GND CON

121.7

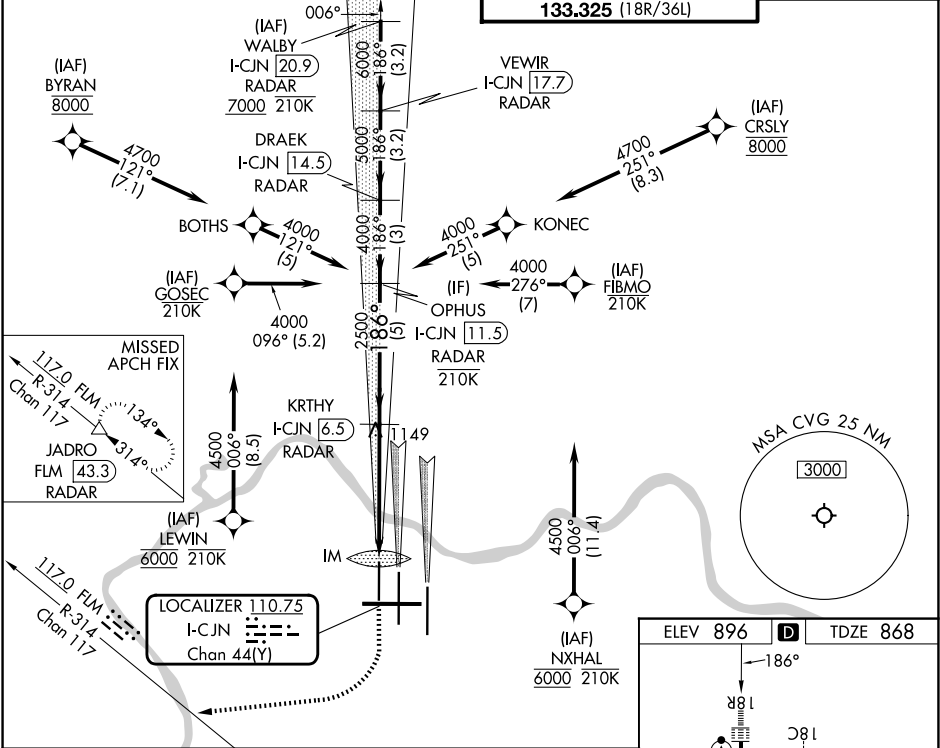

	ELEV 896		TDZE 868	
	HRL all Rwy's		TDZ/CL all Rwy's except 27	
	FAF to MAP 5 NM			
	Knots		Min:Sec	
	60		5:00	
	90		3:20	
	120		2:30	
	150		2:00	
	180		1:40	