

APP CRS
186°

Rwy Ldg
10000

TDZE
889

Apt Elev
896

RNAV (RNP) Z RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From NABRS or OCONO: RF.

MALSR

MISSED APPROACH: Climb to 3000 direct LAPER and on track 136° to FLM VOR/DME and hold.


For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.25 all Cats visibility to 5500 and increase RNP 0.30 all Cats visibility to 1 3/4 SM. Simultaneous approach authorized.

D-ATIS
134.375

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

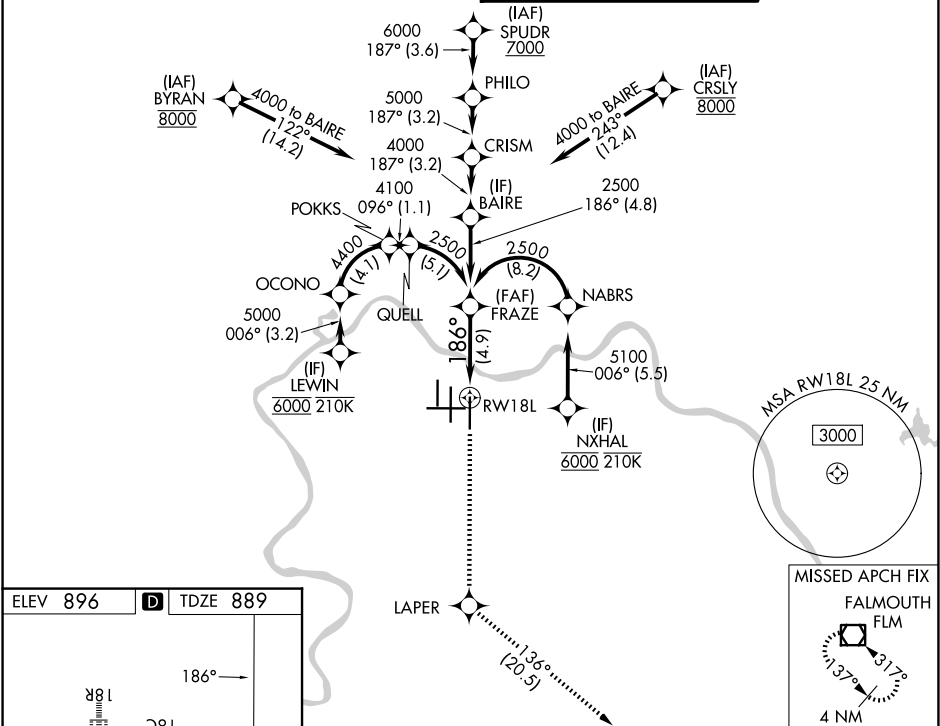

ELEV 896

D

TDZE 889

3000

LAPER

tr 136°

FLM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

See planview for multiple IF locations.

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
RNP 0.25 DA		1240/30	351 (400-5%)	
RNP 0.30 DA		1388/50	499 (500-1)	

AUTHORIZATION REQUIRED