

APP CRS
276°

Rwy Ldg
TDZE
875

12000
875
896

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

RNAV (RNP) Z RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS

For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.3 all Cats visibility to 1½ SM.

MALSR


MISSED APPROACH: Climb to 3000 direct SEMSE and on track 225° to AVIEW and hold.

D-ATIS
134.375

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

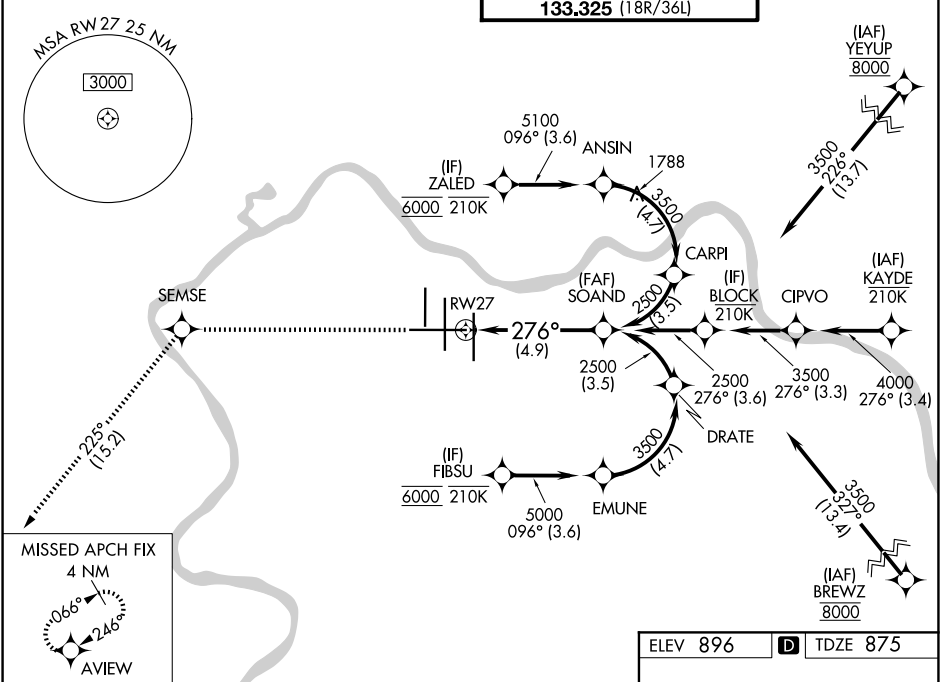

3000	SEMSE	tr 225°	AVIEW	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 67).
RW27 276° 2500 GP 3.00° TCH 55 See planview for multiple IF locations. 4.9 NM				
CATEGORY	A	B	C	D
RNP 0.15 DA		1244/35	369 (400-½)	
RNP 0.23 DA		1260/35	385 (400-½)	
RNP 0.30 DA		1364/50	489 (500-1)	
AUTHORIZATION REQUIRED				

COVINGTON, KENTUCKY

Amdt 1 12JUN25

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

39°03'N-84°40'W

RNAV (RNP) Z RWY 27

ELEV 896

TDZE 875

SE-1, 27 NOV 2025 to 25 DEC 2025

SE-1, 27 NOV 2025 to 25 DEC 2025