


LOC/DME I-LAS 110.3 Chan 40	APP CRS 259°	Rwy Ldg TDZE Apt Elev	26R 12638 2067 2181	26L 10526 2069 2181
---	------------------------	-----------------------------	---	---

ILS Y or LOC Y RWY 26R
HARRY REID INTL (LAS)

RNP APCH - GPS.		MALS Rwy 26R	MALSF Rwy 26L	MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 heading 080° and on BLD R-286 to BLD VORTAC and hold, continue climb-in-hold to 6000.			
▼ ▲ Inop table does not apply to Sidestep 26L. For inop ALS, increase S-ILS-26R all Cats visibility to ¾ SM.		Ⓐ ⏏	Ⓐ ⏏				
D-ATIS 132.4	LAS VEGAS APP CON 125.025 379.15 (West) 119.775 282.2 (East)	LAS VEGAS TOWER 118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)		GND CON 121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R		CLNC DEL 118.0	CPDLC

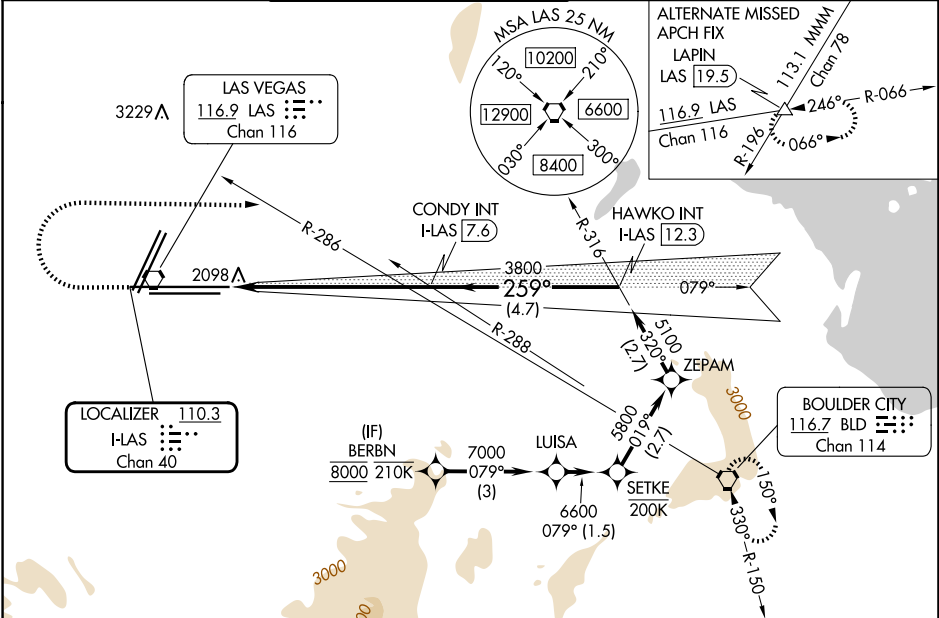

ELEV 2181					D		TDZE 26R 2067		TDZE 26L 2069		
3200	6000	BLD R-286	BLD	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 84).							
↑	hdg 080°		⬡	BERBN							
				HAWKO INT I-LAS 12.3		ZEPAM		SETKE		LUISA	
				CONDY INT I-LAS 7.6		3800		5100		5800	
				I-LAS 2.3		I-LAS 3.6		3800		3200	
				1.4 NM		4 NM		4.7 NM		2.7	
				A		B		C		D	
CATEGORY											
S-ILS 26R				2334-¾ 267 (200-¾)							
S-LOC 26R				2560-¾ 493 (400-¾)				2560-1½ 493 (400-1½)			
SIDESTEP 26L				2560-1 491 (400-1)				2560-1½ 491 (400-1½)		2560-2 491 (400-2)	
CIRCLING				3020-1¼ 839 (900-1¼)		3060-1¼ 879 (900-1¼)		3100-2¾ 919 (1000-2¾)		3540-3 1359 (1400-3)	

Diagram illustrating the approach path and terrain profile for Runway 26R. The path starts at 3200 feet, descends to 6000 feet, and then levels off at 3800 feet. The path is marked with I-LAS (Instrument Landing System) and HAWKO INT (Hawko Intersection). The path is labeled with distances: 1.4 NM, 4 NM, 4.7 NM, 2.7, 2.7, 1.5, and 3 NM. The path is also labeled with altitudes: 3200, 5100, 5800, 6600, 7000, and 8000. The path is labeled with angles: 259°, 320°, and 079°. The path is labeled with names: BERBN, LUISA, SETKE, ZEPAM, HAWKO INT, and CONDY INT. The path is labeled with I-LAS (Instrument Landing System) and HAWKO INT (Hawko Intersection). The path is labeled with distances: 1.4 NM, 4 NM, 4.7 NM, 2.7, 2.7, 1.5, and 3 NM. The path is also labeled with altitudes: 3200, 5100, 5800, 6600, 7000, and 8000. The path is labeled with angles: 259°, 320°, and 079°. The path is labeled with names: BERBN, LUISA, SETKE, ZEPAM, HAWKO INT, and CONDY INT.

Diagram illustrating the approach path and terrain profile for Runway 26R. The path starts at 3200 feet, descends to 6000 feet, and then levels off at 3800 feet. The path is marked with I-LAS (Instrument Landing System) and HAWKO INT (Hawko Intersection). The path is labeled with distances: 1.4 NM, 4 NM, 4.7 NM, 2.7, 2.7, 1.5, and 3 NM. The path is also labeled with altitudes: 3200, 5100, 5800, 6600, 7000, and 8000. The path is labeled with angles: 259°, 320°, and 079°. The path is labeled with names: BERBN, LUISA, SETKE, ZEPAM, HAWKO INT, and CONDY INT.

Diagram illustrating the approach path and terrain profile for Runway 26R. The path starts at 3200 feet, descends to 6000 feet, and then levels off at 3800 feet. The path is marked with I-LAS (Instrument Landing System) and HAWKO INT (Hawko Intersection). The path is labeled with distances: 1.4 NM, 4 NM, 4.7 NM, 2.7, 2.7, 1.5, and 3 NM. The path is also labeled with altitudes: 3200, 5100, 5800, 6600, 7000, and 8000. The path is labeled with angles: 259°, 320°, and 079°. The path is labeled with names: BERBN, LUISA, SETKE, ZEPAM, HAWKO INT, and CONDY INT.

MIRL Rwy 1R-19L					
REIL Rwys 1R, 8R, 19L and 19R					
HIRL Rwys 1L-19R, 8L-26R and 8R-26L					
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

SW-4, 27 NOV 2025 to 25 DEC 2025

SW-4, 27 NOV 2025 to 25 DEC 2025