

LOC/DME FMCE 109.3 Chan 30	APP CRS 304°	Rwy Ldg 5914 TDZE 155 Apt Elev 155
--	------------------------	---

ILS or LOC RWY 30
MERCED YOSEMITE RGNL (MCE)

T
A NA For inop ALS, increase S-LOC visibility to 1 SM.

MALSR
A5

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct HYP VOR/DME and hold.

ASOS
132.175

NORCAL APP CON
120.95 269.45

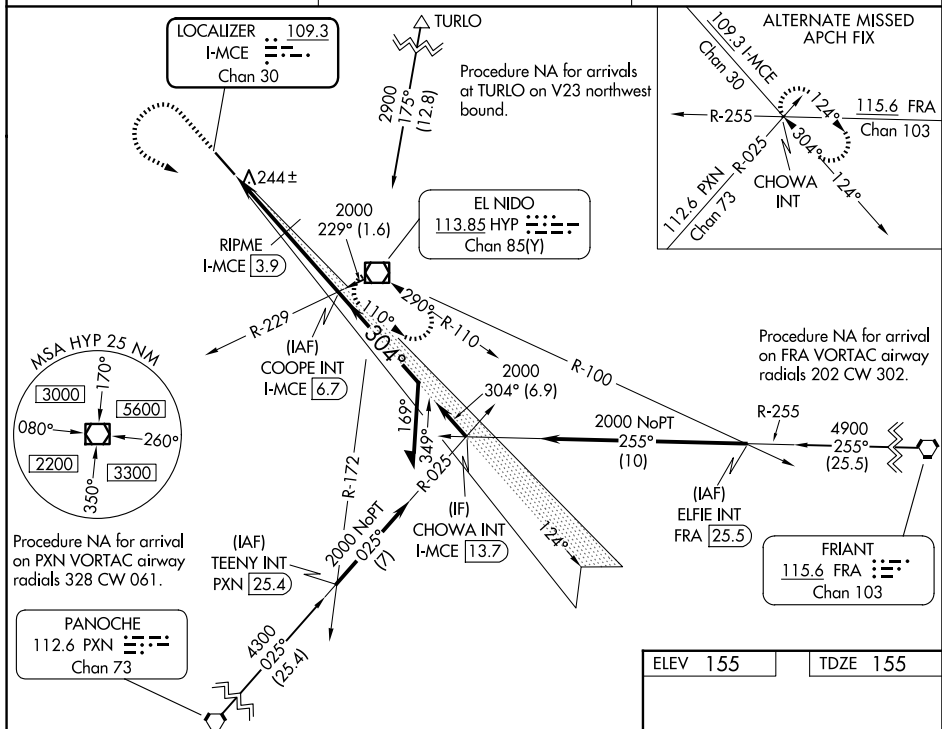
UNICOM
122.7 (CTAF) 

Diagram illustrating the RIPME navigation system and its associated minimums.

Legend:

- 1000: Upward arrow symbol
- 2000: Curved arrow symbol
- HYP: Square symbol with a circle inside

Diagram Details:

- Waypoints: 1000, 2000, COOPE INT I-MCE (6.7), RIPME I-MCE (3.9), I-MCE (1.1), I-MCE (2).
- Distances: 0.9, 1.9, 2.8 NM.
- Angles: 124°, 304°.
- Shaded area: RIPME FIX MINIMUMS.
- GS 3.00° TCH 53.

CATEGORY	A	B	C	D
S-ILS 30	355-½ 200 (200-½)			
S-LOC 30	640-¾ 485 (500-¾)	640-1 485 (500-1)		
RIPME FIX MINIMUMS				
S-LOC 30	500-¾ 345 (400-¾)			

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52