

WAAS CH 53631 W22A	APP CRS 218°	Rwy Ldg 6145 TDZE 68 Apt Elev 75
--	------------------------	---

RNAV (GPS) RWY 22
ATLANTIC CITY INTL (ACY)

RNP APCH - GPS.	
-----------------	--

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct TUBER and hold.



ATIS	ATLANTIC CITY APP CON	ATLANTIC CITY TOWER	GND CON	CLNC DEL
125.725 316.15	124.6 327.125	120.3 239.0	121.9 284.6	127.85 353.775

RADAR REQUIRED
WHEN R-5002B
IS ACTIVE.


CEDAR LAKE
VCN

1800
077°
(16.8)

Procedure NA for arrival on VCN VORTAC
airway radials 066 CW 160.

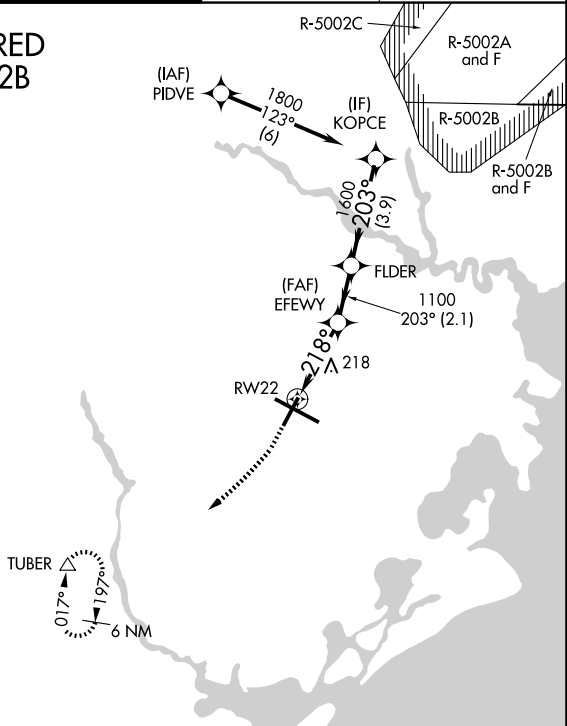

ELEV 75	D	TDZE 68
---------	----------	---------



TDZ/CL Rwy 13
HIRL Rwy 4-22 and 13-31
REIL Rwy 31

ATLANTIC CITY, NEW JERSEY
Amdt 4C 09SEP21

39°27'N-74°35'W

ATLANTIC CITY INTL (ACY)
RNAV (GPS) RWY 22

NE-2, 27 NOV 2025 to 25 DEC 2025

600 ↑		2000 ↗		TUBER △							
* LNAV only.											
CATEGORY		A		B		C		D		E	
LPV	DA	364-1		296 (300-1)							
LNAV/ VNAV	DA	356-7/8		288 (300-7/8)							
LNAV	MDA	520-1 452 (500-1)		520-1 1/8 452 (500-1 1/8)							
CIRCLING		540-1 465 (500-1)		600-1 525 (600-1)		620-1 1/2 545 (600-1 1/2)		640-2 565 (600-2)		760-2 1/2 685 (700-2 1/2)	