

WAAS CH 48804 W24A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	5504 63 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24

MARTHA'S VINEYARD (MVY)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility to RVR 5200; increase LNAV Cats C/D visibility to RVR 5000; increase Circling visibility Cats C to 2 miles and D to 2 ½ mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1½ mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1½ mile and increase LNAV Cats C/D visibility to 1½ mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hyannis altimeter setting.

MALSR

MISSED APPROACH:

Climb to 500 then climbing left turn to 2500 direct CLAMY and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	-------------------------

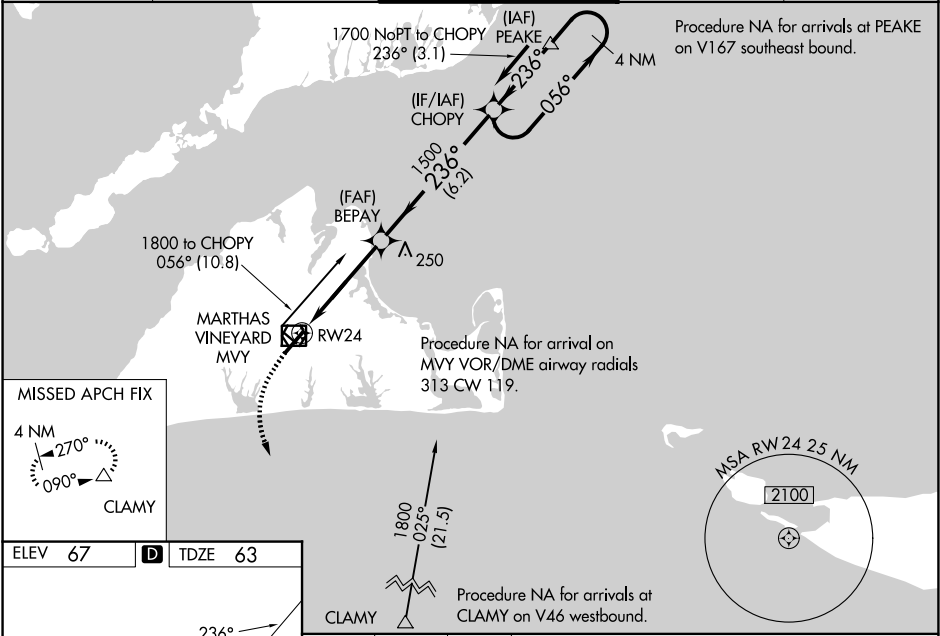

ELEV 67	D	TDZE 63
---------	---	---------

CATEGORY	A	B	C	D
LPV DA	** 263/24 200 (200-½)			
LNAV/ VNAV DA	480/47 417 (500-1)			
LNAV MDA	500/24	437 (500-½)	500/40	437 (500-¾)
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)

VINEYARD HAVEN, MASSACHUSETTS
Amdt 2E 07DEC17

500

2500

CLAMY

4 NM Holding Pattern

CHOPY

056°

236°

1700

GP 3.00° TCH 51°

BEPAY

1500

236°

1500

*LNAV only

*1.2 NM to RW24

RW24

1.2 NM

3.2 NM

6.2 NM

CATEGORY	A	B	C	D
LPV DA	** 263/24 200 (200-½)			
LNAV/ VNAV DA	480/47 417 (500-1)			
LNAV MDA	500/24	437 (500-½)	500/40	437 (500-¾)
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)