

WAAS CH 86419 W14A	APP CRS 139°	Rwy Ldg TDZE 755 Apt Elev 755	RNAV (GPS) RWY 14L UNIVERSITY OF ILLINOIS/WILLARD (CMI)
--	------------------------	---	---


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet and all MDA 60 feet, increase LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Baro-VNAV and ASR VDP NA when using Rantoul altimeter setting.

MISSED APPROACH:
Climb to 2600 direct ODEBE and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

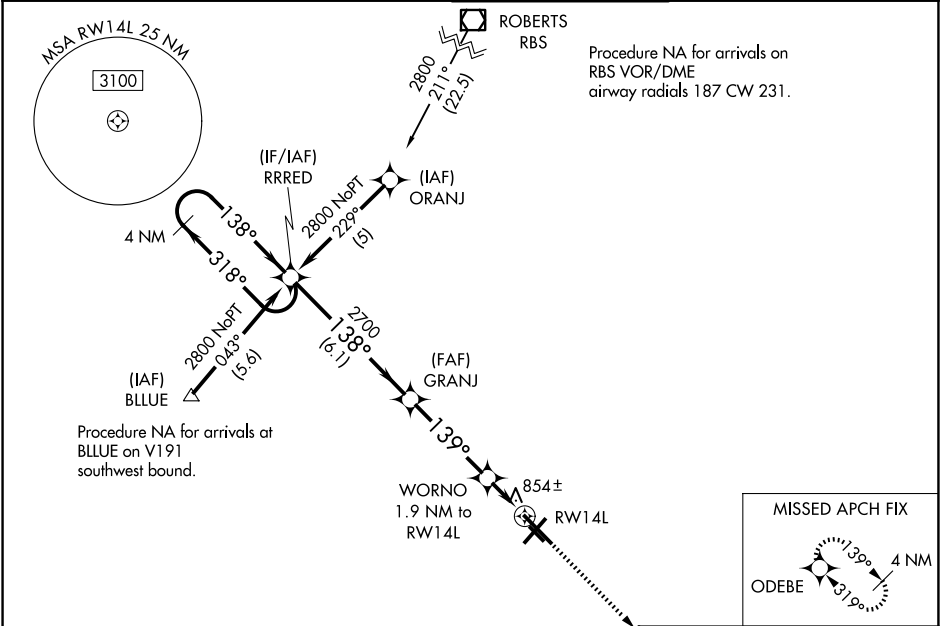

4 NM Holding Pattern		RRRED		2600 ODEBE	
GP 3.00° TCH 48		GRANJ 2700		WORNO 1.9 NM to RW14L	
2800 ← 318° / 138° →		2700		*1380	
6.1 NM		4 NM		0.9 1 NM	
CATEGORY	A	B	C	D	
LPV DA	955-¾		200 (200-¾)		
LNAV/VNAV DA	1170-1½		415 (500-1½)		
LNAV MDA	1120-1 365 (400-1)		1120-1¼ 365 (400-1¼)		
CIRCLING	1240-1	485 (500-1)	1500-2¼ 745 (800-2¼)	1500-2½ 745 (800-2½)	

139°

14L

8101 X 130

14R

6592 X 130

3816 X 75

75

32R

TWR

HIRL Rwy 14L-32R ①
MIRL Rwy 4-22 ①
MIRL Rwy 14R-32L