

WAAS CH 82038 W18A	APP CRS 180°	Rwy Idg 5298 TDZE 680 Apt Elev 682
--	------------------------	---


RNAV (GPS) RWY 18
DECATUR (DEC)

RNP APCH - GPS	
----------------	--

- T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
A Rwy 18 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2300 direct
OKEVE and hold.

ATIS 126.35	CHAMPAIGN APP CON ★ 132.85 290.225	DECATUR TOWER ★ 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
----------------	---------------------------------------	---	---------------------------	------------------

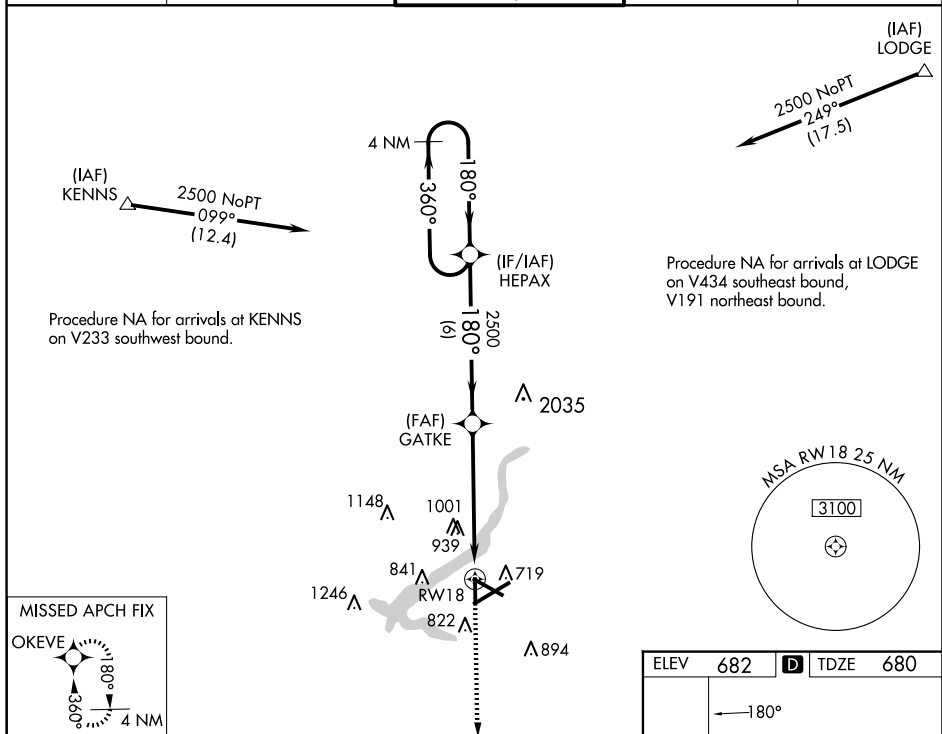

4 NM Holding Pattern

HEPAX

GATKE

2500

2500

360°

180°

GP 3.00° TCH 54

1.6 NM to RW18

RW18

CATEGORY	A	B	C	D
LPV DA		952- $\frac{7}{8}$	272 (300- $\frac{7}{8}$)	
LNAV/VNAV DA		1279-1 $\frac{7}{8}$	599 (600-1 $\frac{7}{8}$)	
LNAV MDA	1240-1	560 (600-1)	1240-1 $\frac{5}{8}$	560 (600-1 $\frac{5}{8}$)
C CIRCLING	1240-1	558 (600-1)	1360-2 678 (700-2)	1360-2 $\frac{1}{4}$ 678 (700-2 $\frac{1}{4}$)

