

LOC I-OSH	APP CRS	Rwy Ldg	8002
110.5	004°	TDZE	808
		Apt Elev	808

ILS or LOC RWY 36

WITTMAN RGNL (OSH)

⚠


When local altimeter setting not received, use Fond Du Lac altimeter setting and increase DA 31 feet and all MDA 40 feet; increase S-LOC 36 Cat C/D and Circling Cat C/D visibilities ¼ mile. For inop MALSRL when using Fond Du Lac altimeter setting, increase S-LOC 36 Cat C/D visibility to 1½ mile. Circling to Rwy 5, 23, and 31 NA at night.
* RVR 1800 authorized with the use of FD or AP or HUD to DA, NA when using Fond Du Lac altimeter setting.

MALSRL

MISSED APPROACH:

Climb to 1300 then climbing right turn to 3000 on OSH R-111 to LEWKO INT/OSH 15 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) 290.9	132.3	122.95

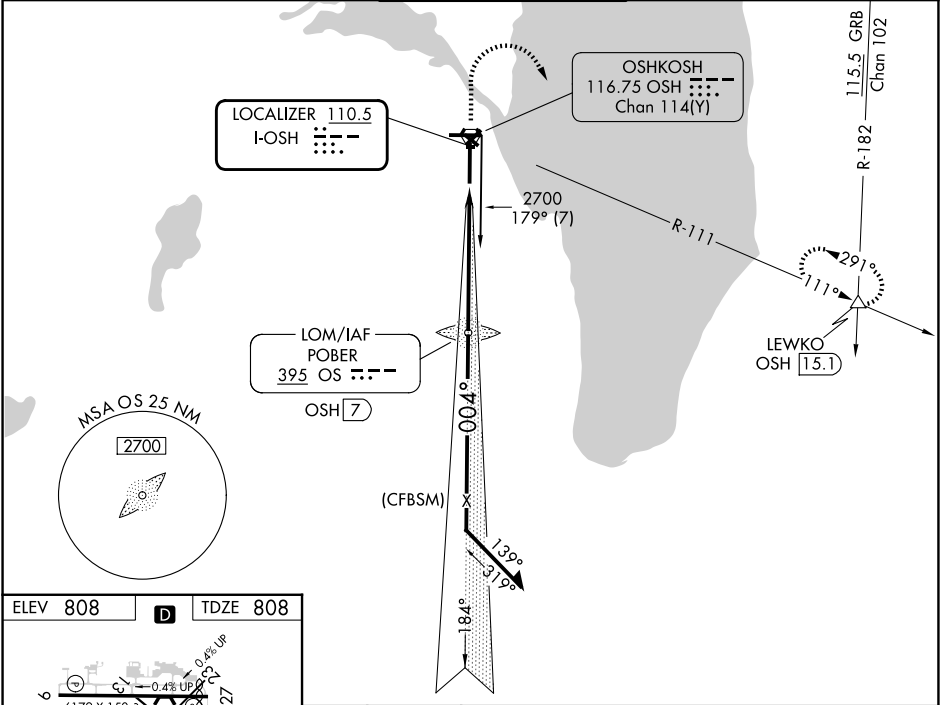

ELEV 808

TDZE 808

REIL Rwys 18 and 27

HIRL Rwys 9-27 and 18-36

FAF to MAP 5.4 NM

Knots 60 90 120 150 180

Min:Sec 5:24 3:36 2:42 2:10 1:48

1300	3000	LEWKO	OS LOM OSH 7	Remain within 10 NM
↑	OSH R-111	△	2610	184°
			004°	2700
			2700	GS 3.00° TCH 53
			5.4 NM	
CATEGORY	A	B	C	D
S-ILS 36 *	1008/24 200 (200-½)			
S-LOC 36	1340/24	532 (600-½)	1340/55	532 (600-1)
CIRCLING	1340-1	532 (600-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

EC-3, 27 NOV 2025 to 25 DEC 2025

EC-3, 27 NOV 2025 to 25 DEC 2025