

WAAS

CH **90503**

W19A

APP CRS

190°

Rwy Idg

6001

TDZE

19

Apt Elev

19

RNAV (GPS) RWY 19

NORTHEASTERN RGNL (EDE)

RNP APCH - GPS.


▼

Baro-VNAV NA when using Elizabeth City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Elizabeth City altimeter setting and increase LPV DA to 276 feet; increase LNAV/VNAV DA to 355 feet and all visibilities ½ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. VDP NA when using Elizabeth City altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:

Climb to 600 then right turn to 2500 direct IDWAP and hold.

AWOS-3 118.275	WASHINGTON CENTER 123.85 279.65	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

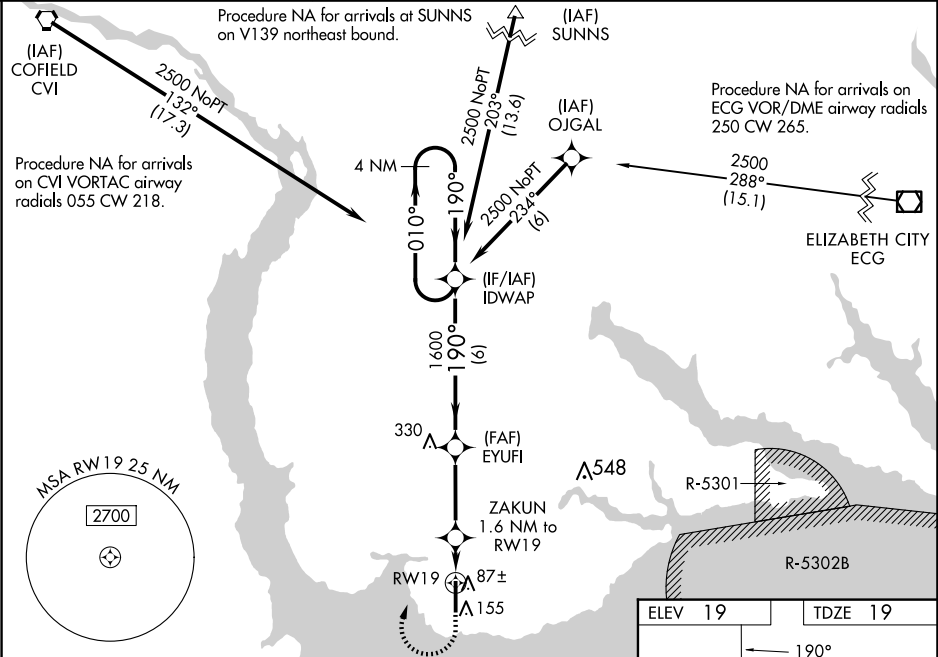

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).

4 NM Holding Pattern

IDWAP

2500

←010°

190°→

190°

1600

GP 3.00°

TCH 43

EYUFI

1600

ZAKUN

1.6 NM to RWY 19

0.9 NM to RWY 19

RWY 19

*560

6 NM

3.2 NM

0.7

0.9

ELEV 19

TDZE 19

190°

6001 X 100

1

156

MIRL Rwy 1-19 0

REIL Rwy 1 and 19 0

CATEGORY	A	B	C	D
LPV DA		219-¾	200 (200-¾)	
LNAV/VNAV DA		289- ⅞	270 (300-⅞)	
LNAV MDA		400-1⅛	381 (400-1⅛)	
CIRCLING	520-1	501 (600-1)	560-1½ 541 (600-1½)	580-2 561 (600-2)

EDENTON, NORTH CAROLINA

Amdt 2D 16MAY24

36°02'N-76°34'W

NORTHEASTERN RGNL (EDE)

RNAV (GPS) RWY 19