WAAS CH 69219 W04A	APP CRS 041°	Rwy Ldg 5001 TDZE 270 Apt Elev 288

RNAV (GPS) RWY 4
AUBURN/LEWISTON MUNI (LEW)

Circling to Rwy 17, 22, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase visibility LNAV/VNAV all Cats to 1⅜ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1⅝ SM. Rwy 04 helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH: Climb to 3100 direct WUDDE and hold.

AWOS-3PT	PORTLAND APP CON ★	CLNC DEL	UNICOM
118.025	125.5 353.9	124.05	122.8 (CTAF) L

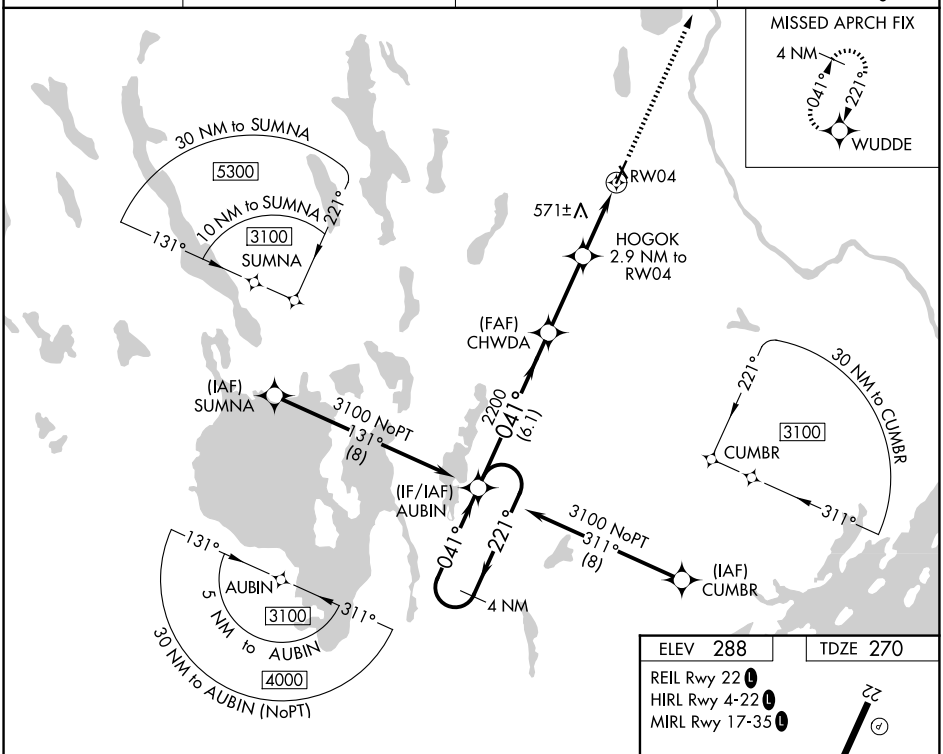

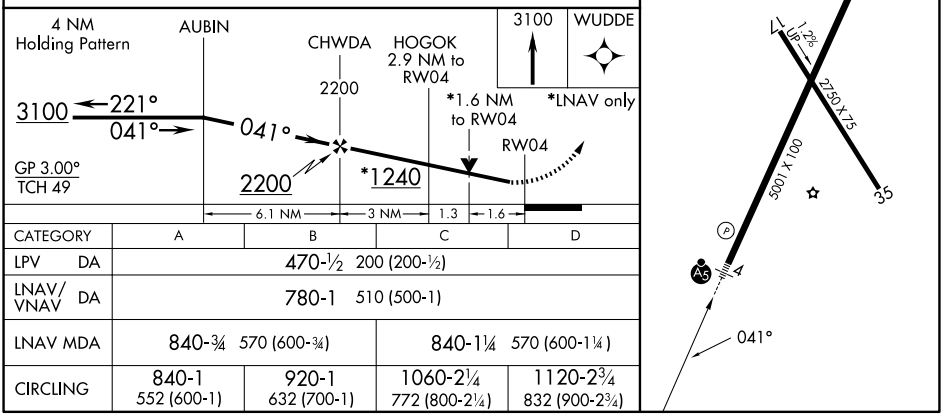

CATEGORY	A	B	C	D
LPV DA	470-½ 200 (200-½)			
LNAV/VNAV DA	780-1 510 (500-1)			
LNAV MDA	840-¾ 570 (600-¾)		840-1¼ 570 (600-1¼)	
CIRCLING	840-1 552 (600-1)	920-1 632 (700-1)	1060-2¼ 772 (800-2¼)	1120-2¾ 832 (900-2¾)