

LOC I-RAL 110.9	APP CRS 089°	Rwy Ldg TDZE Apt Elev 5401 795 819
---------------------------	------------------------	--


ILS or LOC RWY 9
RIVERSIDE (RAL)

⚠ Circling NA north of Rwy 9-27 for Cat D. When local altimeter setting not received, use Chino altimeter setting and increase all DA 46 feet and all MDA 60 feet, increase S-ILS 9 visibility 1/8 mile all Cats, S-LOC 9 Cat C/D visibility 1/8 mile. Autopilot coupled approach NA below 1192.


*Missed approach requires minimum climb of 270 feet per NM to 2500.

MISSED APPROACH: Climb to 2000 then climbing right turn to 4200 on PDZ VORTAC R-098 to PDZ VORTAC then on PDZ VORTAC R-256 to WISUP INT/PDZ VORTAC 9.4 DME and hold.

ATIS 128.8	SOCAL APP CON 135.4 377.125	RIVERSIDE TOWER ★ 121.0 (CTAF) 0 257.8	GND CON 124.12	UNICOM 122.95
----------------------	---------------------------------------	--	--------------------------	-------------------------

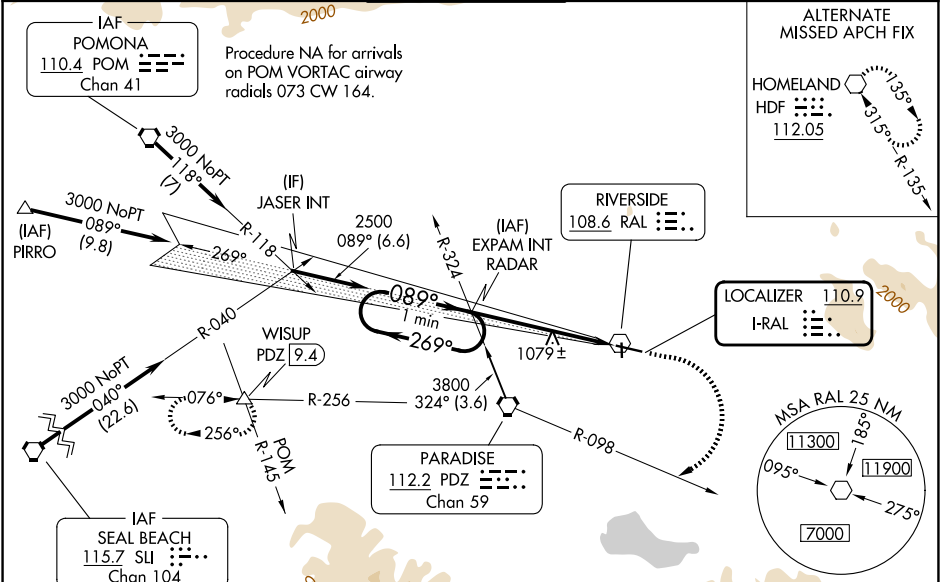

ELEV 819	TDZE 795
----------	----------

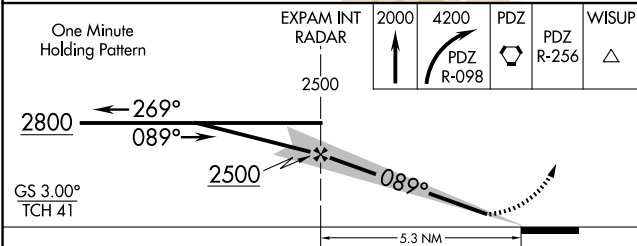

CATEGORY	A	B	C	D
S-ILS 9*		995-3/4	200 (200-3/4)	
S-ILS 9		1131-1	336 (400-1)	
S-LOC 9*	1280-1	485 (500-1)	1280-13/8	485 (500-13/8)
S-LOC 9	1360-1	565 (600-1)	1360-15/8	565 (600-15/8)
CIRCLING	1360-1 541 (600-1)	1680-11/4 861 (900-11/4)	1800-3 981 (1000-3)	1960-3 1141 (1200-3)

