
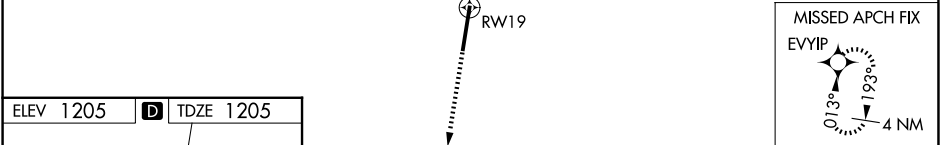


WAAS CH 86616 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	9072 1205 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3500 direct EVYIP and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.				
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

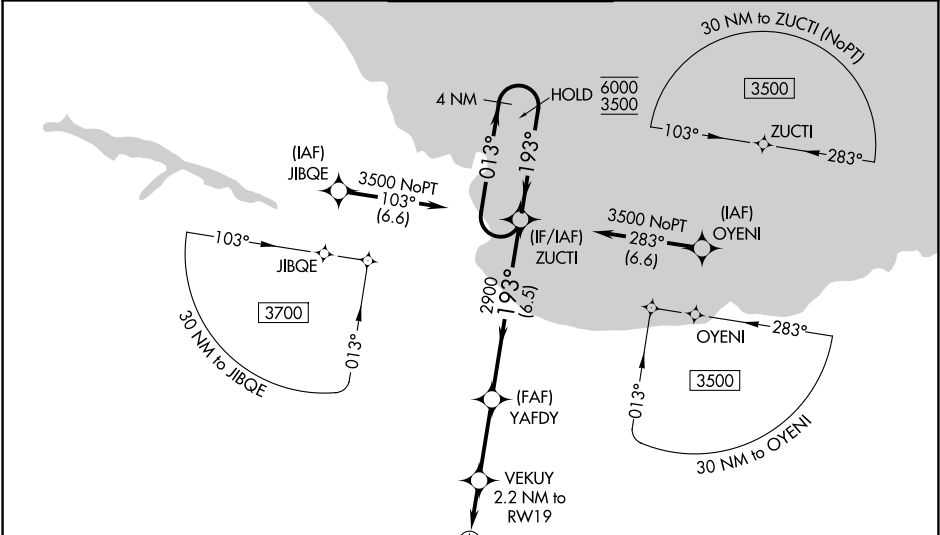

HIRL Rwy 1-19 **L**
 REIL Rwy 19 **L**

3500 ↑ EVYIP	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).	4 NM Holding Pattern	ZUCTI 013° → 6000 ← 193° 3500	
VEKUY 2.2 NM to RW19 YAFDY 2900 1.6 NM to RW19 1960 1.6 NM 0.6 NM 2.9 NM 6.5 NM	GP 3.00° TCH 60	193° 2900		
CATEGORY	A	B	C	D
LPV DA	1405- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/VNAV DA	1522- ⁷ / ₈ 317 (400- ⁷ / ₈)			
LNAV MDA	1620-1	415 (500-1)	1620-1 ¹ / ₈	415 (500-1 ¹ / ₈)
CIRCLING	1680-1	475 (500-1)	1820-1 ³ / ₄ 615 (700-1 ³ / ₄)	1820-2 615 (700-2)