
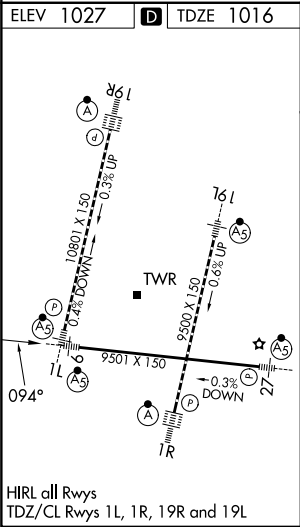



APP CRS	Rwy Ldg	9501
094°	TDZE	1016
	Apt Elev	1027

RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)

RNP AR APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° LYMES and hold.		
▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.						
D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC	

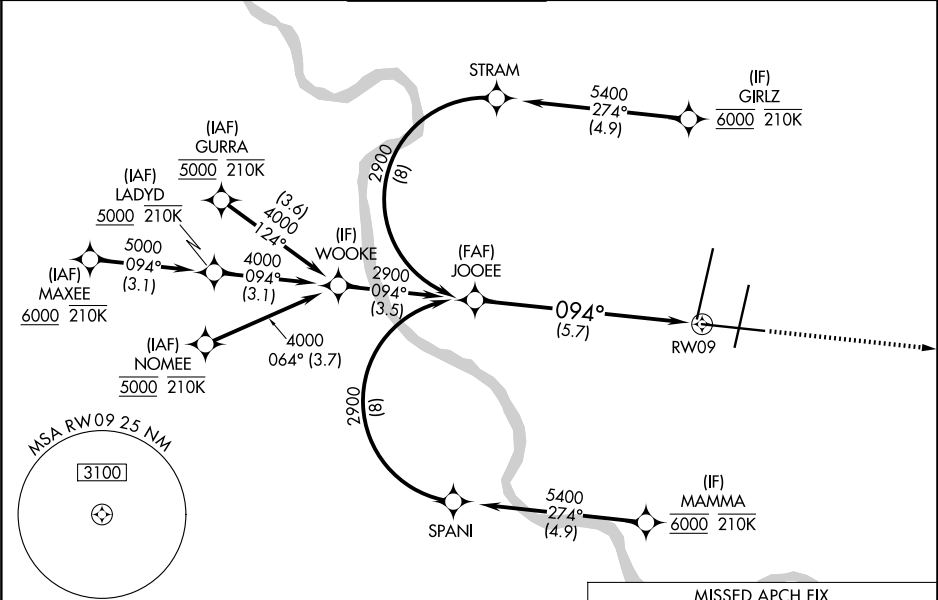

ELEV 1027	D	TDZE 1016
		
(not to scale) 4 NM		
See planview for multiple IF locations.		
JOOEE 2900		
GP 3.00° TCH 56		
5.7 NM		
CATEGORY	A	B
RNP 0.20 DA	1319/24	303 (300-½)
RNP 0.30 DA	1418/40	402 (400-¾)
AUTHORIZATION REQUIRED		