

LOC/DME I-JEF	APP CRS	Rwy Ldg	6000
110.5	304°	TDZE	549
Chan 42		Apt Elev	549

ILS or LOC RWY 30

JEFFERSON CITY MEML (JEF)

ADF required.


⚠

Circling Rwy 9 NA at night. For inop ALS increase S-LOC 30 Cats C/D visibility to 1¾ SM and WAPGY fix minimums: S-LOC 30 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct ALGOA LOM and hold, continue climb-in-hold to 2800.

ASOS	MIZZU APP CON	JEFFERSON CITY TOWER★	GND CON	UNICOM
133.625	124.375 353.925	125.6 (CTAF) 0	121.7	122.95

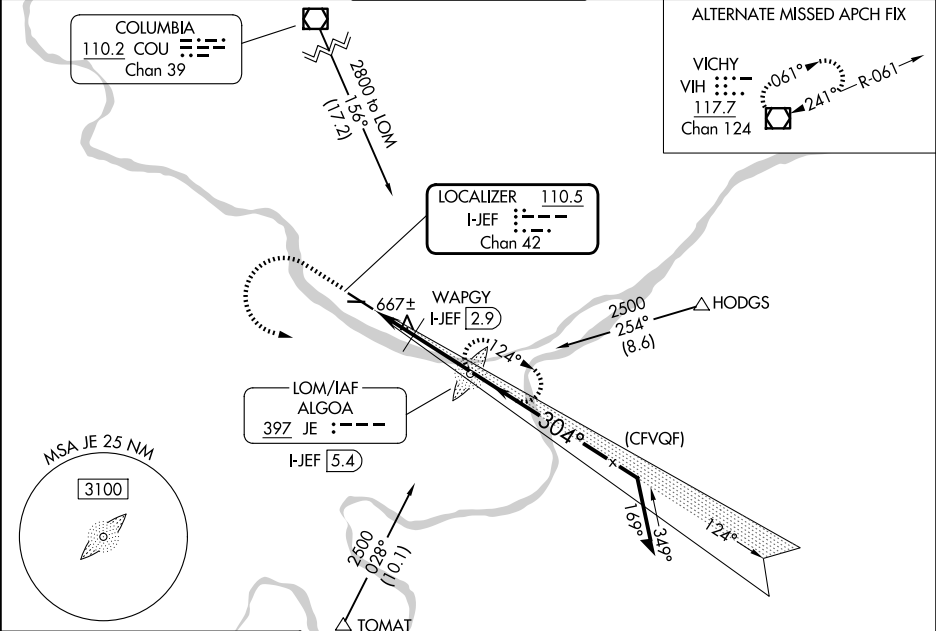

ELEV 549

TDZE 549

1500

2800

JE

WAPGY

I-JEF 2.9

1941

1160

2000

2500

124°

304°

1 NM

0.8

2.5 NM

GS 3.00°

TCH 54

12

6000 X 100

TWR

27

3401 X 75

130

304°

HIRL Rwy 12-30

MIRL Rwy 9-27

REIL Rwys 9, 12, and 27

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

CATEGORY	A	B	C	D
S-ILS 30	749-½ 200 (200-½)			
S-LOC 30	1160-½	611 (700-½)	1160-1⅓	611 (700-1⅓)
CIRCLING	1280-1	731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)
WAPGY FIX MINIMUMS				
S-LOC 30	920-½	371 (400-½)	920-⅝	371 (400-⅝)
CIRCLING	1280-1	731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)