

WAAS	APP CRS	Rwy Idg	5343
CH 97421	053°	TDZE	124
W05A		Apt Elev	125

RNAV (GPS) RWY 5

LUMBERTON RGNL (LBT)

RNP APCH - GPS.


▼

▲

When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2000 direct
WIVGA and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	--------------------------

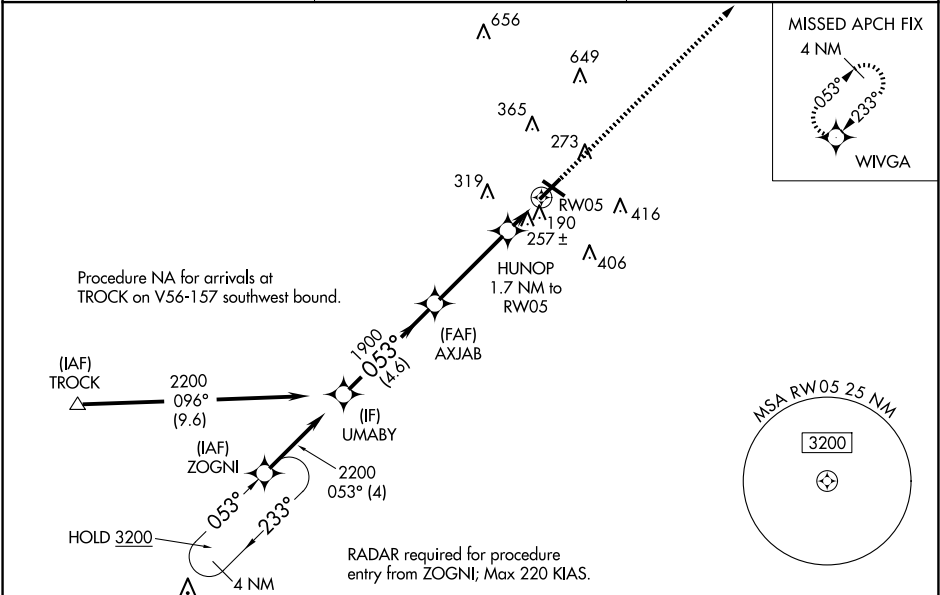

2114		ELEV 125		TDZE 124	
UMABY		AXJAB		2000	
2200		1900		WVGA	
Procedure Turn NA		HUNOP 1.7 NM to RW05		* LNAV only.	
GP 3.00° TCH 60		1900		720*	
4.6 NM		3.7 NM		0.6	
CATEGORY		A		B	
LPV DA		327-3/4		203 (300-3/4)	
LNAV/VNAV DA		538-1 1/8		414 (500-1 1/8)	
LNAV MDA		520-1		396 (400-1)	
CIRCLING		660-1		535 (600-1)	

2000		WVGA	
↑		✦	
* LNAV only.			
1.1 NM to RW05		RW05	
5007X		5505 X 150	
13		31	
053°			
MIRL Rwy 5-23		REIL Rws 5 and 23	

SE-2, 27 NOV 2025 to 25 DEC 2025

SE-2, 27 NOV 2025 to 25 DEC 2025