

WAAS
CH **78207**
W15A

APP CRS
146°


Rwy Ldg
TDZE **2193**
Apt Elev **2193**

RNAV (GPS) RWY 15
ONTARIO MUNI (ON0)

Baro-VNAV NA when using Caldwell altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Caldwell altimeter setting and increase LPV DA to 2867 feet, LNAV/VNAV DA to 2911 feet, and all MDA 100 feet; increase LPV visibility, all Cats by ½ SM, increase LNAV visibility Cats C/D and Circling Cat C by ¼ SM. Rwy 15 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 15 NA at night, Circling Rwy 15 NA at night.

MISSED APPROACH:
Climbing right turn to 9000 direct HOVEL and hold, continue climb-in-hold to 9000.

ASOS 135.275	SALT LAKE CENTER 128.05 306.95	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

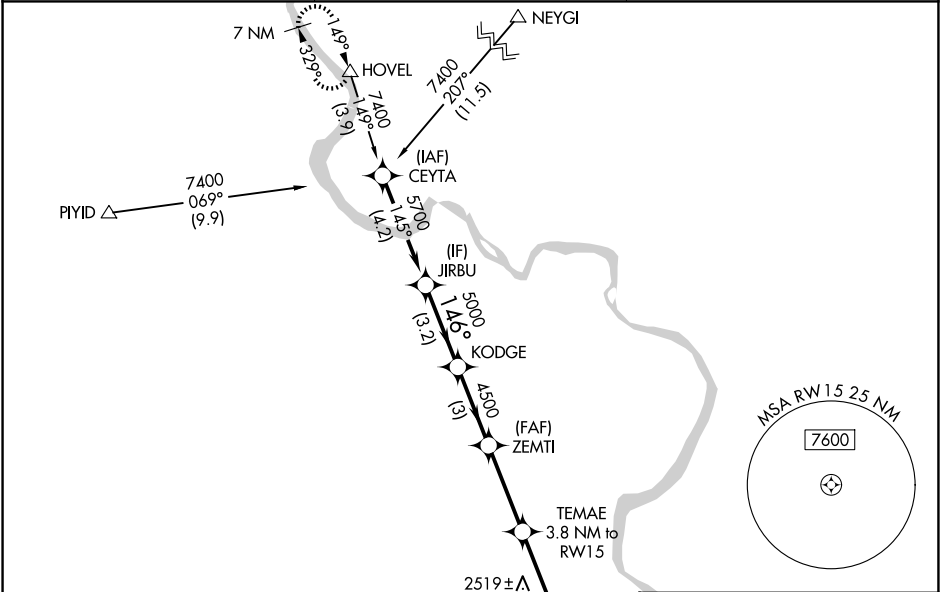

JIRBU		KODGE		ZEMTI		TEMAE		RWY 15	
5700		5000		4500		3.8 NM to RWY 15		*3440	
GP 3.00°		TCH 40		3.2 NM		3 NM		3.3 NM	
CATEGORY		A		B		C		D	
LPV DA		2769-2		576 (600-2)					
LNAV/VNAV DA		2814-2½		621 (700-2½)					
LNAV MDA		2780-1		587 (600-1)		2780-1¾		587 (600-1¾)	
CIRCLING		2780-1		2800-1		3120-2¾		3240-3	
		587 (600-1)		607 (700-1)		927 (1000-2¾)		1047 (1100-3)	

ELEV 2193

TDZE 2193

146°

500x100

33

MRL Rwy 15-33 0

REIL Rwy 15 and 33 0