
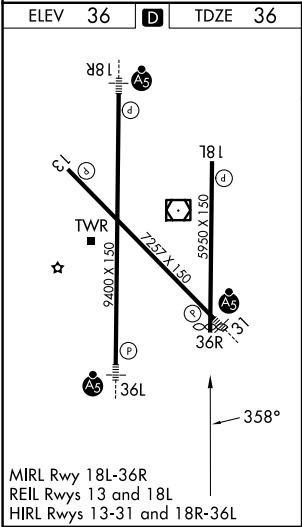


WAAS CH 72830 W36A	APP CRS 358°	Rwy Ldg TDZE 36 Apt Elev 36
--	------------------------	---

RNAV (GPS) RWY 36R

VALLEY INTL (HRL)

RNP APCH - GPS.				MISSED APPROACH: Climb to 2000 direct BETVE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Baro-VNAV and VDP NA when using Port Isabel altimeter setting. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 278 feet; increase LNAV/VNAV DA to 328 feet and all visibilities ½ SM, increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cats C and D ¼ SM.				
ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 317.6	GND CON 121.7	UNICOM 122.95

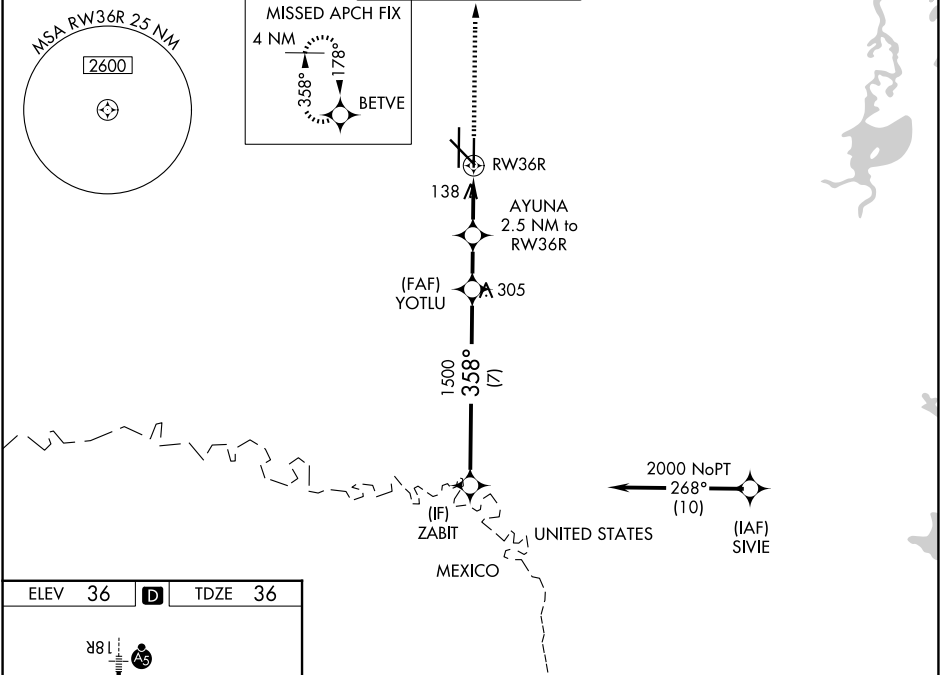

2000 BETVE		AYUNA 2.5 NM to RW36R		YOTLU 1500		ZABIT 2000	
1 NM to RW36R		1 NM to RW36R		1500		GP 3.00° TCH 55	
1 NM		1.5 NM		2 NM		7 NM	
CATEGORY	A		B		C		D
LPV DA	236-¾		200 (200-¾)				
LNAV/VNAV DA	286-¾		250 (300-¾)				
LNAV MDA	400-1		364 (400-1)				
CIRCLING	460-1		560-1		600-1½		680-2
	424 (500-1)		524 (600-1)		564 (600-1½)		644 (700-2)