

RNP APCH - GPS.



▼

Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 327 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 327 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH:

Climb to 2000 direct AMAPE and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
----------------	-------------------------------	---	------------------	------------------

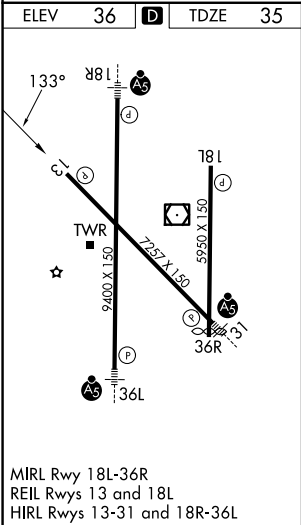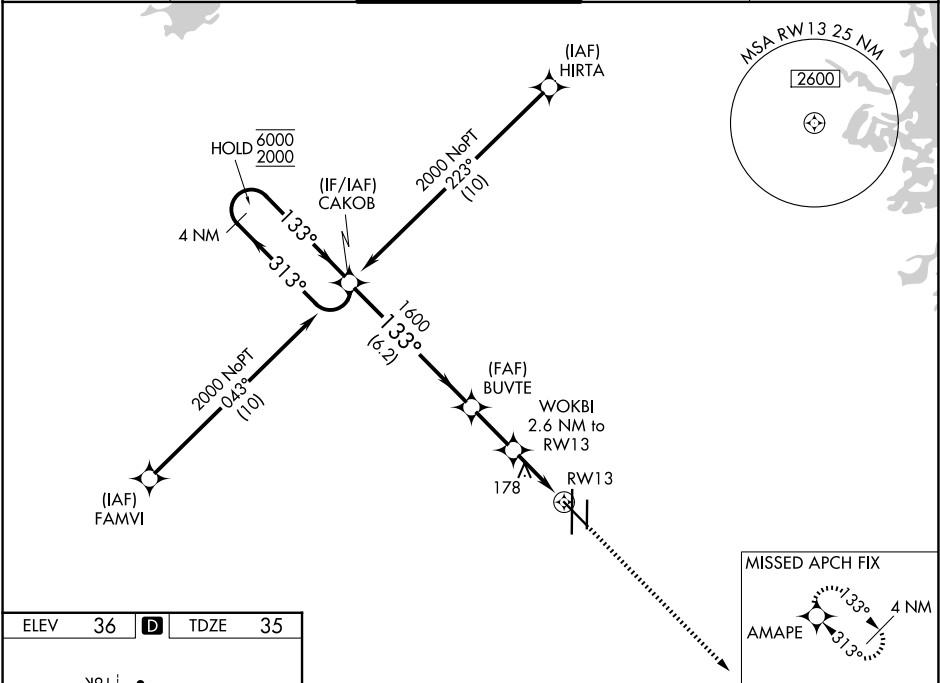

4 NM Holding Pattern				CAKOB		2000 ↑		AMAPE ✦	
6000 2000		←313° 133°→		133°		1600		920	
GP 3.00° TCH 59				6.2 NM		2.1 NM		1.5 NM	
CATEGORY		A		B		C		D	
LPV DA				285-¾		250 (300-¾)			
LNAV/ VNAV DA				285-¾		250 (300-¾)			
LNAV MDA		440-1		405 (500-1)		440-1½		405 (500-1½)	
CIRCLING		460-1 424 (500-1)		560-1 524 (600-1)		600-1½ 564 (600-1½)		680-2 644 (700-2)	