

WAAS CH 82530 W31A	APP CRS 313°	Rwy Ldg TDZE Apt Elev	7257 36 36
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 31
VALLEY INTL (HRL)


RNP APCH - GPS	
----------------	--

▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For Inop ALS, increase LNAV/VNAV all Cats visibilities to ¾ SM. For Inop ALS when using Port Isabel altimeter setting, increase LNAV/VNAV all Cats visibilities to ⅞ SM. When local altimeter setting not received, use Port Isabel altimeter setting; increase LPV DA to 278 feet; increase LNAV/VNAV DA to 328 feet; increase all MDAs 60 feet and LNAV-visibility Cats C and D ⅓ SM and Circling visibility Cat C and D ¼ SM.

MALSR

MISSED APPROACH:
Climb to 2000 direct
CAKOB and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

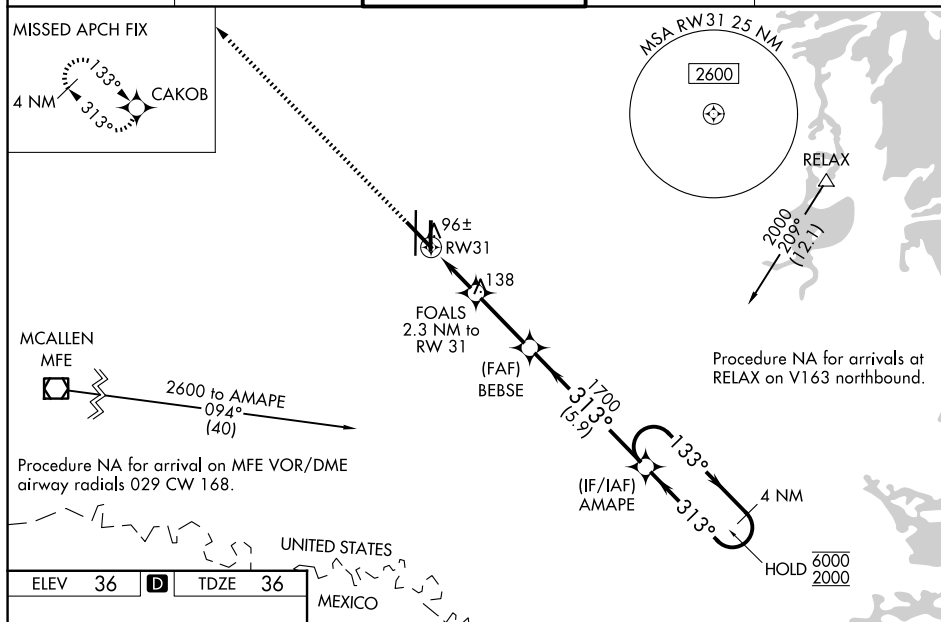

MIRMIL Rwy 18L-36R
 REIL Rwys 13 and 18L
 HIRL Rwys 13-31 and 18R-36L

CATEGORY	A	B	C	D
LPV DA	236-½	200 (200-½)		
LNAV/VNAV DA	286-½	250 (300-½)		
LNAV MDA	360-½	324 (400-½)		
CIRCLING	460-1 424 (500-1)	560-1 524 (600-1)	600-1½ 564 (600-1½)	680-2 644 (700-2)

HARLINGEN, TEXAS

Amdt 4 11JUL24

VALLEY INTL (HRL)

26°14'N-97°39'W

RNAV (GPS) Y RWY 31