

WAAS CH 93712 W36A	APP CRS 002°	Rwy Ldg TDZE 346 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 36

TUPELO RGNL (TUP)


RNP APCH:

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ¾ mile and Circling Cats C and D ½ mile. For inop ALS when using Columbus AFB altimeter setting, increase LPV all Cats visibility ½ SM. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.



MISSED APPROACH:
Climb to 3000 direct
ZUMHA and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

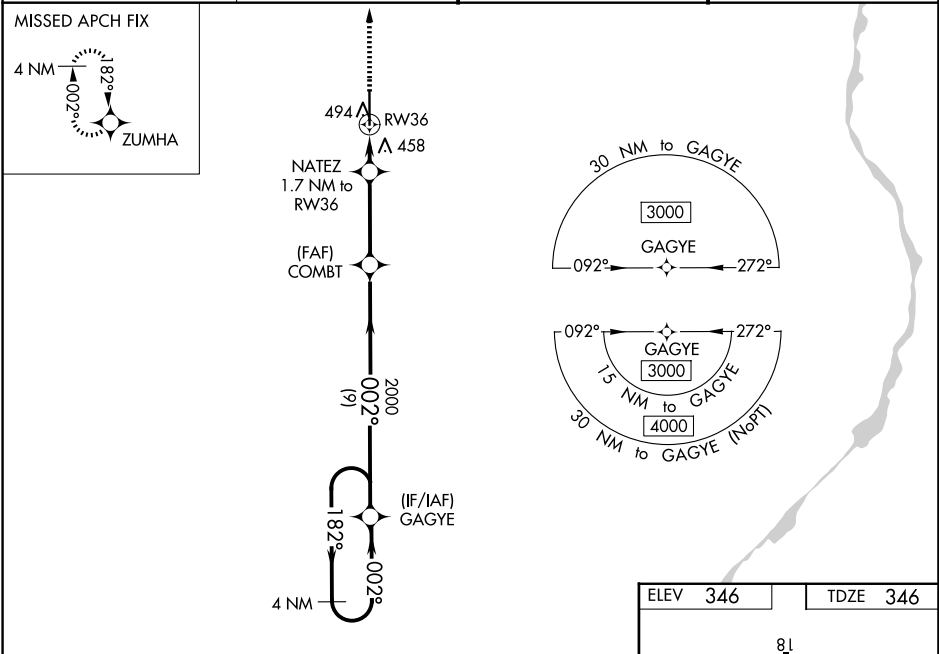

3000	ZUMHA	*LNAV only.	COMBT	GAGYE	4 NM Holding Pattern
↑	✧		NATEZ 1.7 NM to 2000	182° → 3000	
		*1 NM to RW36		← 002°	
			*920	2000	GP 3.00° TCH 55
CATEGORY	A	B	C	D	
LPV DA		546-½	200 (200-½)		
LNAV/VNAV DA		730-¾	384 (400-¾)		
LNAV MDA	720-½	374 (400-½)	720-⅝	374 (400-⅝)	
CIRCLING	820-1	474 (500-1)	900-1½ 554 (600-1½)	1140-2½ 794 (800-2½)	

