


WAAS CH 53426 W14A	APP CRS 143°	Rwy Ldg TDZE 1276 Apt Elev 1297
--	------------------------	---

RNAV (GPS) RWY 14
MANSFIELD LAHM RGNL (MFD)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 36°C (96°F). When local altimeter not received, use Marion altimeter setting and increase all DA 107 feet and all MDA 120 feet, and LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats, and LNAV Cat C/D to 1 3⁄8 SM. Increase Circling Cat C/D visibility 1⁄2 SM. VDP and Baro-VNAV NA when using Marion altimeter setting.

MISSED APPROACH:
Climb to 3000 direct PIRCI and hold.

ATIS 125.3	CLEVELAND APP CON ★ 128.35 360.65	MANSFIELD TOWER ★ 119.8 (CTAF) 291.775	GND CON 121.8 291.775	UNICOM 122.95
----------------------	---	--	---------------------------------	-------------------------

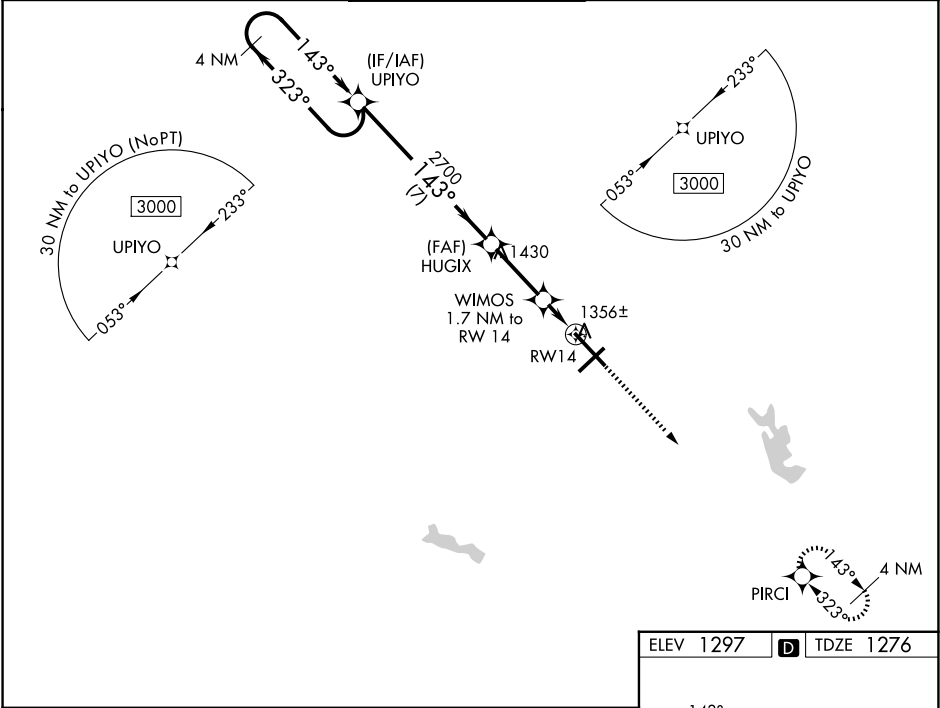

4 NM Holding Pattern UPIYO

3000 ← 323°
143° →

GP 3.00°
TCH 42

HUGIX 2700

WIMOS 1.7 NM to RW14

*1 NM to RW14

RW14

*LNAV only.

3000 PIRCI

CATEGORY	A	B	C	D
LPV DA	1476-3⁄4 200 (200-3⁄4)			
LNAV/VNAV DA	1557-7⁄8 281 (300-7⁄8)			
LNAV MDA	1620-1 344 (400-1)			
CIRCLING	1760-1 463 (500-1)	2000-2 703 (800-2)		2000-2 1⁄4 703 (800-2 1⁄4)

