

|                                                 |                        |                                                             |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|
| LOC/DME I-TYN<br><b>110.9</b><br>Chan <b>46</b> | APP CRS<br><b>036°</b> | Rwy Ldg <b>8000</b><br>TDZE <b>40</b><br>Apt Elev <b>42</b> |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|

ILS or LOC RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)


DME required for procedure entry and for LOC only.

⚠

Rwy 4R helicopter visibility reduction below  $\frac{3}{4}$  SM NA. VDP NA when using Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase S-ILS 4R and S-LOC 4R visibility all Cats  $\frac{1}{8}$  SM, Circling visibility Cat C/D  $\frac{1}{4}$  SM.

MISSED APPROACH: Climb to 2000 on LFT R-035 to BEDDY INT/LFT 18.9 DME and hold.

|                       |                                           |                                                  |                         |                         |
|-----------------------|-------------------------------------------|--------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>134.05</b> | LAFAYETTE APP CON ★<br><b>121.1 363.0</b> | LAFAYETTE TOWER ★<br><b>118.5 (CTAF) 0 257.8</b> | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|-------------------------------------------|--------------------------------------------------|-------------------------|-------------------------|

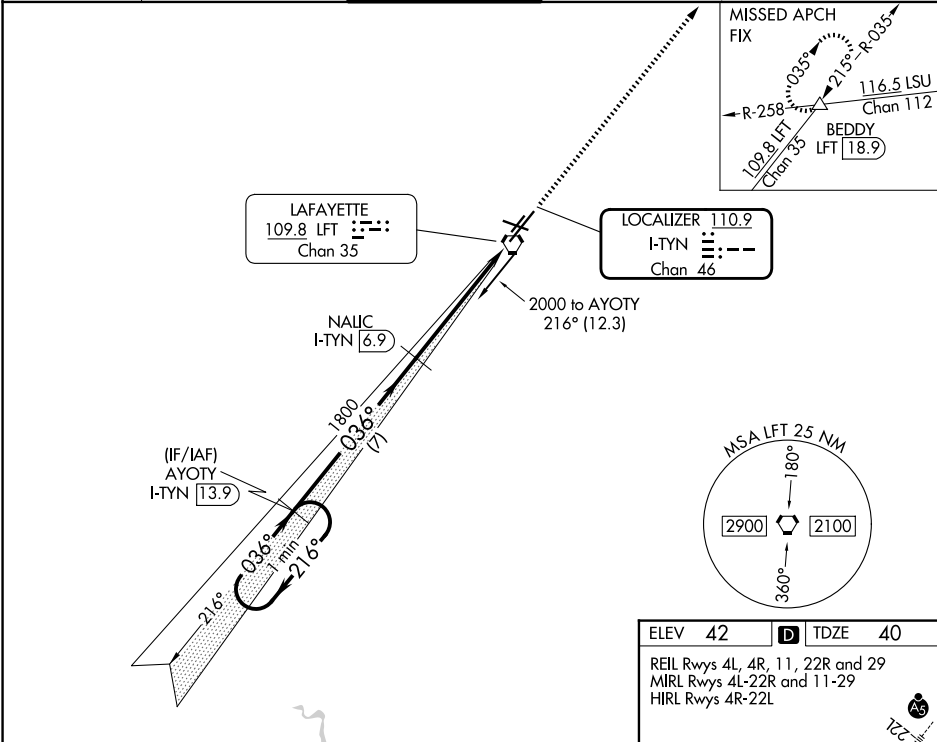

One Minute Holding Pattern

AYOTY I-TYN 13.9

NAUIC I-TYN 6.9

2000

2000

BEDDY

LFT R-035

\* LOC only.

2000 ← 216°

036° →

036°

1800

\* I-TYN 2.8

I-TYN 1.6


7 NM

4.1 NM

1.3 NM

GS 3.00°  
TCH 49

| CATEGORY | A                                            | B                    | C                                                 | D                    |
|----------|----------------------------------------------|----------------------|---------------------------------------------------|----------------------|
| S-ILS 4R | 316- $\frac{7}{8}$ 276 (300- $\frac{7}{8}$ ) |                      |                                                   |                      |
| S-LOC 4R | 500-1 460 (500-1)                            |                      | 500- $\frac{13}{8}$ 460 (500- $\frac{13}{8}$ )    |                      |
| CIRCLING | 540-1<br>498 (500-1)                         | 580-1<br>538 (600-1) | 700- $\frac{13}{4}$<br>658 (700- $\frac{13}{4}$ ) | 700-2<br>658 (700-2) |

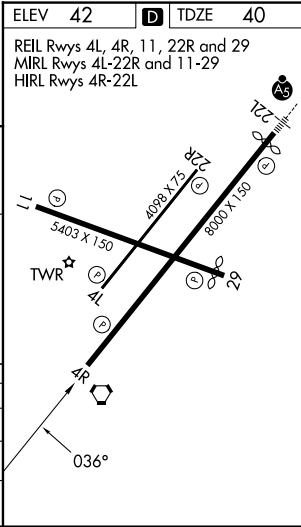

SC-4, 27 NOV 2025 to 25 DEC 2025

SC-4, 27 NOV 2025 to 25 DEC 2025