WAAS CH 45903 W04A	APP CRS 036°	Rwy Ldg 8000 TDZE 40 Apt Elev 42

RNAV (GPS) RWY 4R

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

RNP APCH.

Rwy 4R helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct BEDDY and hold.

ATIS	LAFAYETTE APP CON ★	LAFAYETTE TOWER ★	GND CON	UNICOM
134.05	121.1 363.0	118.5 (CTAF) C 257.8	121.8	122.95

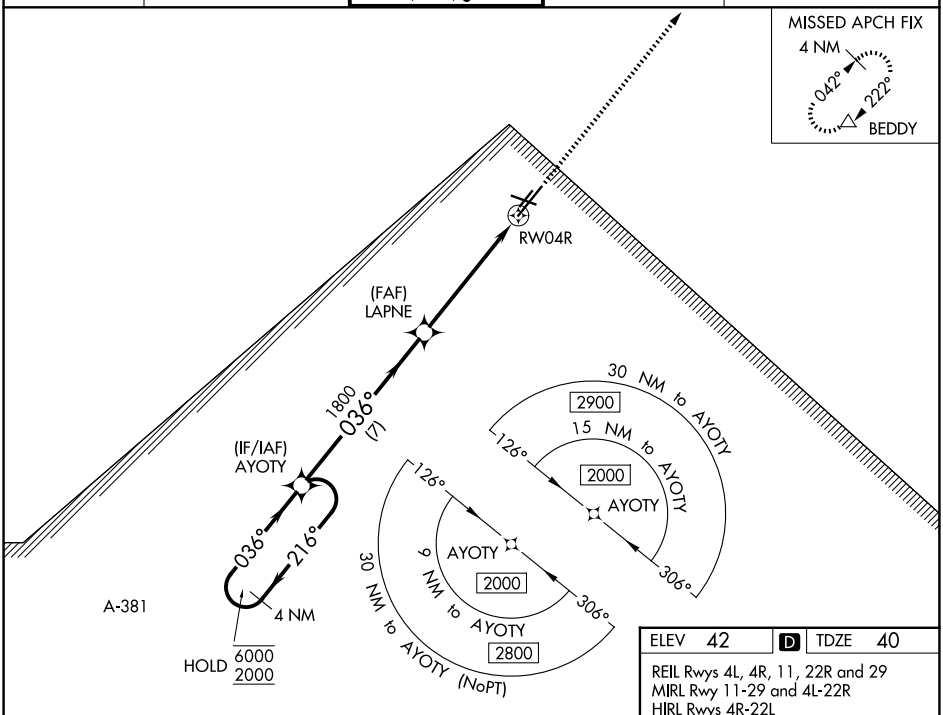

ELEV 42	D	TDZE 40

REIL Rwys 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwys 4R-22L

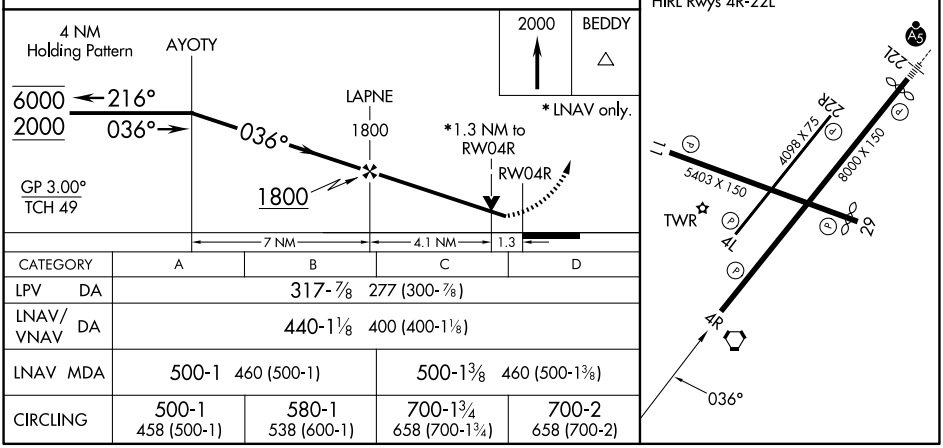

CATEGORY	A	B	C	D
LPV DA	317-⅞ 277 (300-⅞)			
LNAV/VNAV DA	440-1⅛ 400 (400-1⅛)			
LNAV MDA	500-1 460 (500-1)		500-1⅜ 460 (500-1⅜)	
CIRCLING	500-1 458 (500-1)	580-1 538 (600-1)	700-1¾ 658 (700-1¾)	700-2 658 (700-2)

SC-4, 27 NOV 2025 to 25 DEC 2025