


WAAS CH 42902 W36A	APP CRS 002°	Rwy Ldg TDZE Apt Elev	8201 684 695
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 36
GREEN BAY/AUSTIN STRAUBEL INTL (GRB)


RNP APCH.	MALS R	MISSED APPROACH: Climb to 2500 direct ANEPE and hold.
ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C/D visibility to RVR 5500. ** RVR 1800 authorized with use of FD or AP or HUD to DA.	

ATIS 124.1	GREEN BAY APP CON★ 119.4 338.2	GREEN BAY TOWER★ 118.7(CTAF) 257.8	GND CON 121.9
----------------------	--	--	-------------------------

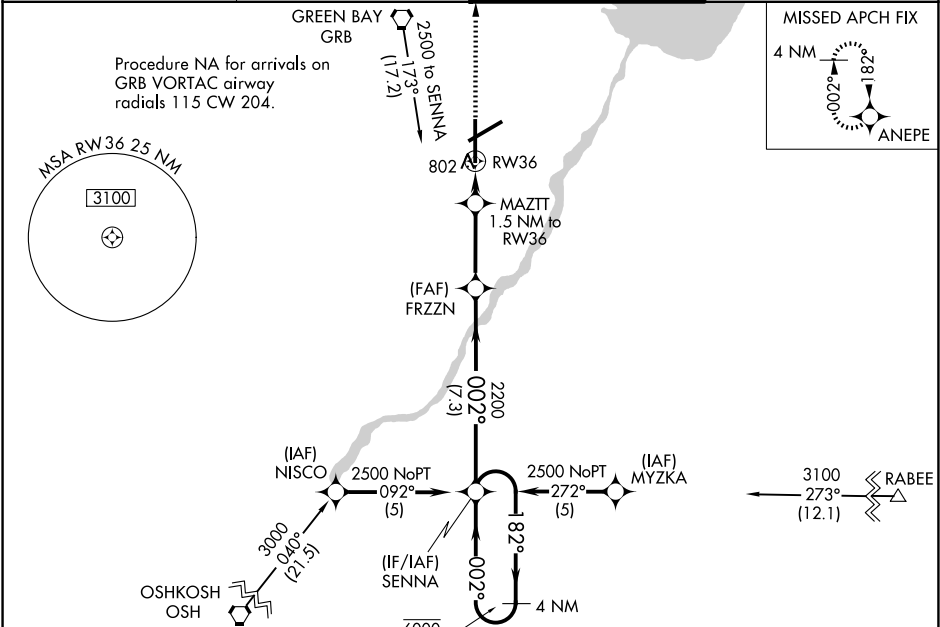

ELEV 695	D	TDZE 684
HIRL Rwy 6-24 and 18-36 REIL Rwy 18		

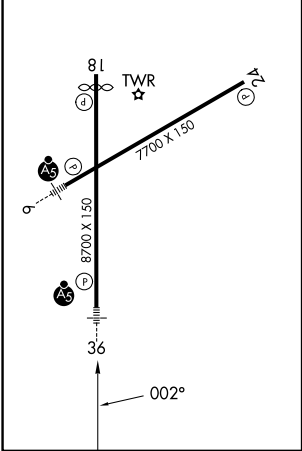

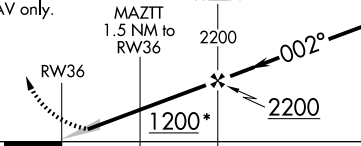HOLD 2500					
2500 ↑	ANEPE 	4 NM Holding Pattern			
* LNAV only.		MAZTT 1.5 NM to RW36	FRZZN 2200	SENN A 182° → ← 002°	6000 2500
		GP 3.00° TCH 50			
CATEGORY	A	B		C	D
LPV DA	884/24 200 (200-½)				
LNAV/ VNAV DA	1097/40 413 (500-¾)				
LNAV MDA	1060/24	376 (400-½)	1060/35		376 (400-¾)
CIRCLING	1200-1	505 (600-1)	1300-1¾ 605 (700-1¾)		1300-2 605 (700-2)