


APP CRS	Rwy Ldg	9007
020°	TDZE	2966
	Apt Elev	2977

RNAV (RNP) Y RWY 2
GLACIER PARK INTL (GPI)

RF and GPS required. Missed approach requires RNP less than 1.0. For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 43°C (109°F). For inoperative MALSR increase RNP 0.10* visibility to 1¼ and RNP 0.30 visibility to 2. *Missed approach requires minimum climb of 220 feet per NM to 6100.	MALSR 	MISSED APPROACH: Climb to 10000 via left turn to JOGAD, and via left turn to TONUUY, and via 121° track to WILTO and via 129° track to ANGL and hold.
---	--	--

ATIS 132.625	SALT LAKE CENTER 127.075 244.875	GLACIER TOWER ★ 124.55 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------	-------------------------------------	------------------------------------	------------------	------------------

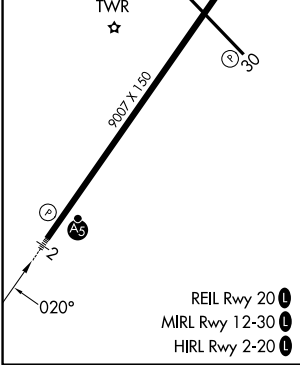

Procedure Turn NA	JUNRU	WULEX	AVDIH	10000	JOGAD	ROYOG
GP 3.00°	8000	7200	6200	5200	5200	5200
TCH 51	3 NM	3.2 NM	7.1 NM	6.7 NM		
CATEGORY	A	B	C	D		
RNP 0.10 DA*	NA		3340-¾	374 (400-¾)		
RNP 0.30 DA	NA		3522-1½	556 (600-1½)		

AUTHORIZATION REQUIRED

NW-1, 27 NOV 2025 to 25 DEC 2025

NW-1, 27 NOV 2025 to 25 DEC 2025