
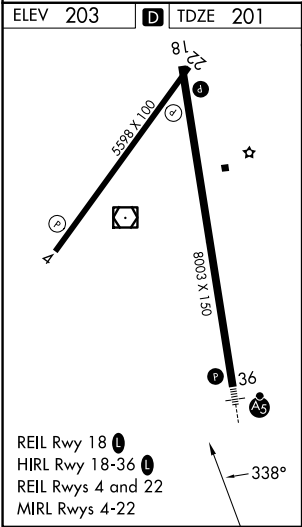


VOR/DME OTK	APP CRS	Rwy Ldg
114.8	338°	8002
Chan 95		TDZE 201
		Apt Elev 203

VOR RWY 36
VALDOSTA RGNL (VLD)

⚠ Rwy 36 helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-36 Cats C and D visibility to 1½ SM. ASMUC fix minimums: increase S-36 C and D visibility to 1½ SM. Circling Rwy 4 and 22 NA at night. Inop table does not apply to S-36 Cats A and B and ASMUC fix minimums: Cat A and B. Straight-in and Circling Rwy 36 NA at night.	MALSR	MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 direct OTK VOR/DME and hold, continue climb-in-hold to 2000.
--	--------------	--

ASOS	VALDOSTA APP CON *	VALDOSTA TOWER *	GND CON	UNICOM
126.225	126.6 285.6	128.35 (CTAF) 0	121.7	122.95

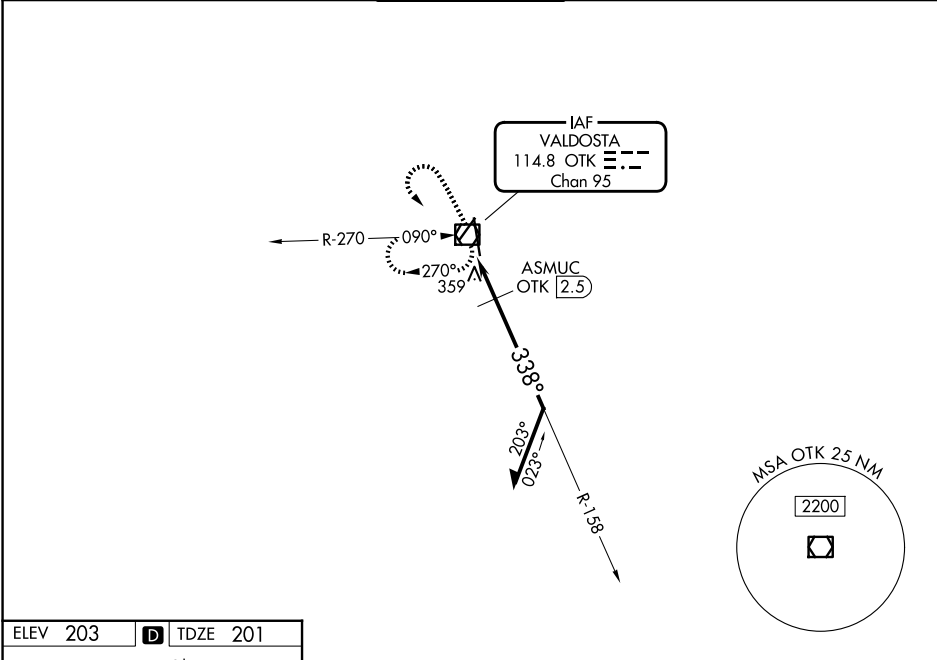

1200	2000	OTK				
------	------	-----	--	--	--	--