


ILS or LOC RWY 24

NORTHEAST ALABAMA RGNL (GAD)


MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	-----------------------------------

DME REQUIRED

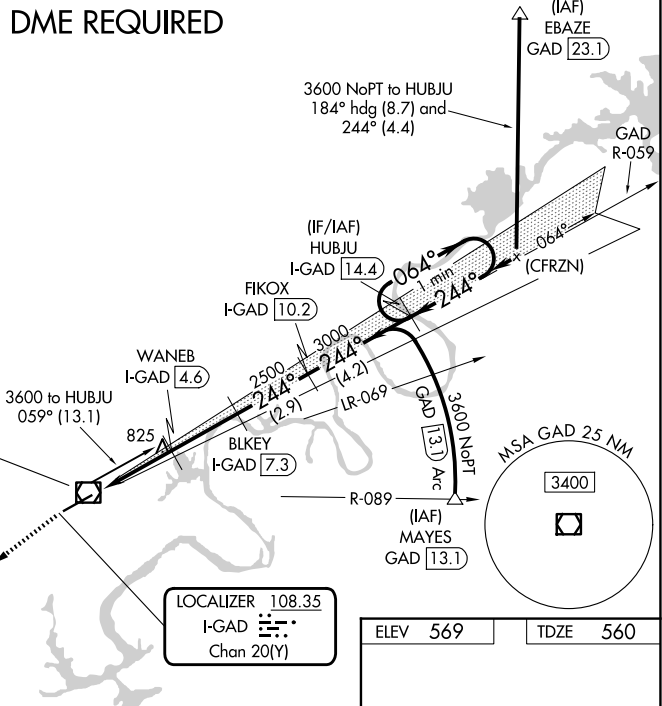

3600 ↑	GAD R-231	STAMP △	Use I-GAD DME when on the localizer course.		HUBJU I-GAD 14.4
*LOC only.			BIKEY I-GAD 7.3	FIKOX I-GAD 10.2	One Minute Holding Pattern
The diagram illustrates the approach procedure. It starts with a localizer course from the left. Key waypoints and distances are: WANE B (I-GAD 4.6), 2500, BIKEY (I-GAD 7.3), FIKOX (I-GAD 10.2), and HUBJU (I-GAD 14.4). The final segment of the approach is a straight line at 244° heading, starting from a point 1.7 NM before WANE B. This segment includes a 1620* foot altitude constraint and a 2500 foot step-down. The distance from the start of this segment to HUBJU is 4.2 NM. The holding pattern at HUBJU is a one-minute circle with a GS 3.00° and TCH 43°.					
CATEGORY	A	B	C	D	
S-ILS 24	779·¾ 219 (300·¾)				
S-LOC 24	1140-1	580 (600-1)	1140·1¾	580 (600·1¾)	
CIRCLING	1140-1	571 (600-1)	1440·2½ 871 (900·2½)	1680-3 1111 (1200-3)	

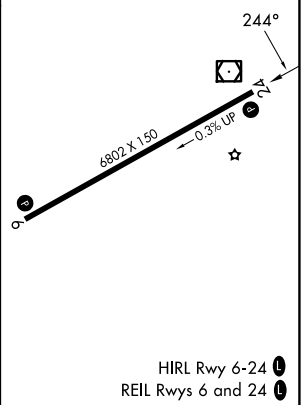

SE-4, 27 NOV 2025 to 25 DEC 2025