

HI-TACAN Z RWY 24R

TACAN NKX Chan 33	APCH CRS 247°	Rwy Idg 24R 12,000 24L 8001 TDZE 24R 475 24L 477 Arpt Elev 477
-----------------------------	-------------------------	---

[USN]


MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

*When ALS inop, increase CAT CDE vis to 1½ miles. **CAT E circling not authorized S of Rwy 6R-24L.	ALSF-1	MISSED APPROACH: Climb to 1500, then climbing right turn to 7000 via NKX TACAN R-003 to HUKVO. Arc NE of NKX via 16 mile arc to WARNT and hold. Cross R-323 at 3000 mandatory, cross HUKVO at 6000 mandatory.
--	---------------	--

ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	LA CENTER 291.7	ASR/ PAR
-------------------------	------------------------------	---------------------------------	----------------------------	--------------------	-------------


Knots	60	120	180	240	300	360
V/V(fpm)	275	550	825	1100	1375	1650

ATC climb of 275 ft/NM to 6000

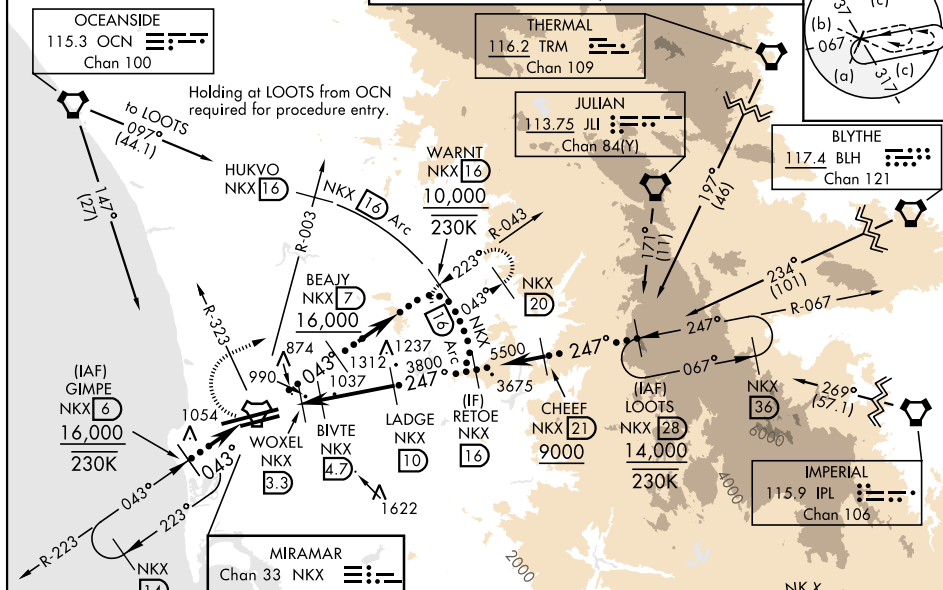


EMERG SAFE ALT 100 NM 13,600


1500	cross NKX R-323 3000	7000	cross HUKVO NKX 16 6000	VGSI and descent angles not coincident.
------	-------------------------	------	-------------------------------	--

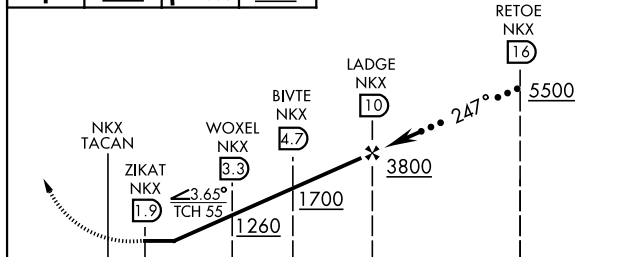

CATEGORY	C	D	E
S-24R*	1140-1½	665	(700-1½)
SIDESTEP 24L	1140-1⅞ 663 (700-1⅞)	1140-2 663 (700-2)	1140-2¼ 663 (700-2¼)
CIRCLING**	1140-1⅞ 663 (700-1⅞)	1180-2¼ 703 (800-2¼)	1360-3 883 (900-3)



ELEV	477	TDZE 24R	475
		TDZE 24L	477



HIRL Rwy 6L-24R ①
HIRL Rwy 6R-24L ①

HI-TACAN Z RWY 24R