

ILS Y or LOC/DME Y RWY 24R

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

TACAN or RADAR required

T * When ALS inop, increase vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT AB vis to 1 mile,
 CAT CDE vis to $1\frac{3}{8}$ miles.
 *** CAT E circling not authorized S of Rwy 6R-24L.

ALSF-1


MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 via heading 340°. Expect radar vectors.

ATIS ★
133.475
352 0


SOCAL APP CON	132.2	269.1
---------------	-------	-------

FOSS TOWER ★
135.2
298.925 L

GND CON
128.625
307.325

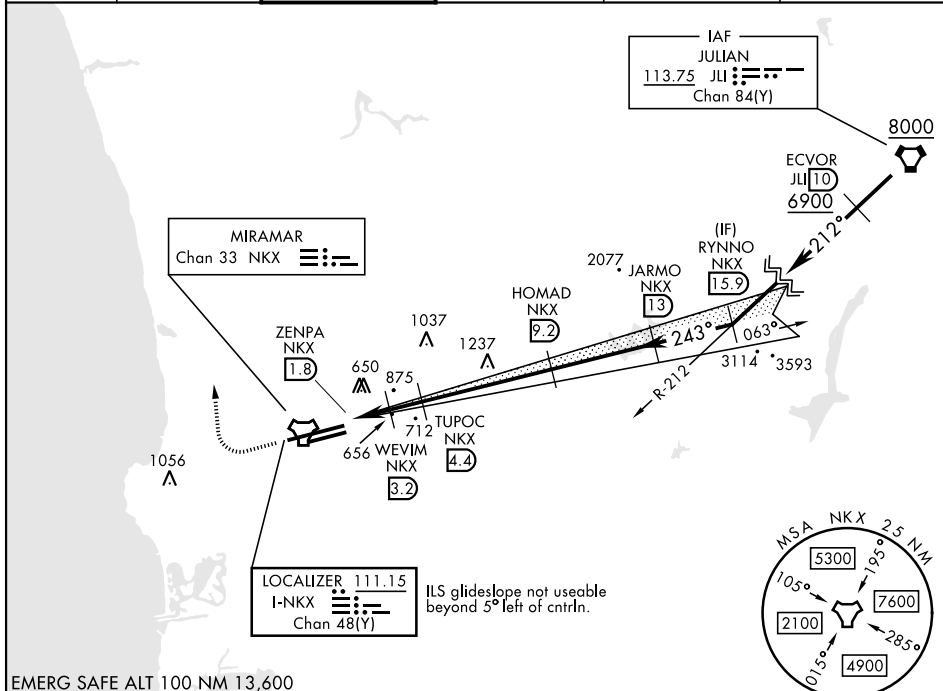LA CENTER
291.7ASR/
PAR



EMERG SAFE ALT 100 NM 13,600



VGSI and descent angles not coincident.

ELEV	477
------	-----

TDZE	24L	477
TDZE	24R	475

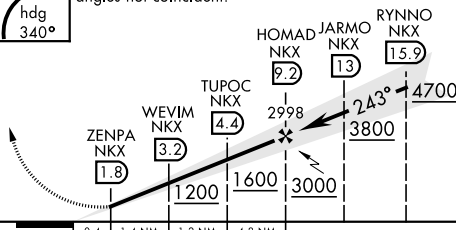

CATEGORY	A	B	C	D	E
S-ILS 24R*	675 - 1/2	200	(200 - 1/2)		
S-LOC 24R**	920 - 1/2 445 (500 - 1/2)	920 - 7/8 445 (500 - 7/8)			
SIDESTEP 24L	920-1 443 (500-1)	920-1 1/2 443 (500-1 1/2)	920-2 443 (500-2)		
CIRCLING***	940-1 463 (500-1)	960-1 483 (500-1)	960-1 1/2 483 (500-1 1/2)	1180-2 703 (800-2)	1360-3 883 (900-3)

HIRL Rwy 6L-24R **L**
HIRL Rwy 6R-24L

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Orig 14JUL22

ILS Y or LOC/DME Y RWY 24R