

SAN DIEGO, CALIFORNIA

25107

RNAV (GPS) RWY 24L

WAAS CH 54028 W24A	APCH CRS 243°	Rwy Idg TDZE Arpt Elev	8001 477 477
--------------------------	------------------	------------------------------	--------------------


[USN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

RNP APCH		MISSED APPROACH: Climb to 3000 direct HUVEL, 288° track to REDIN and hold.			
ATIS ★ 133.475 352.0	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7 ASR/ PAR

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

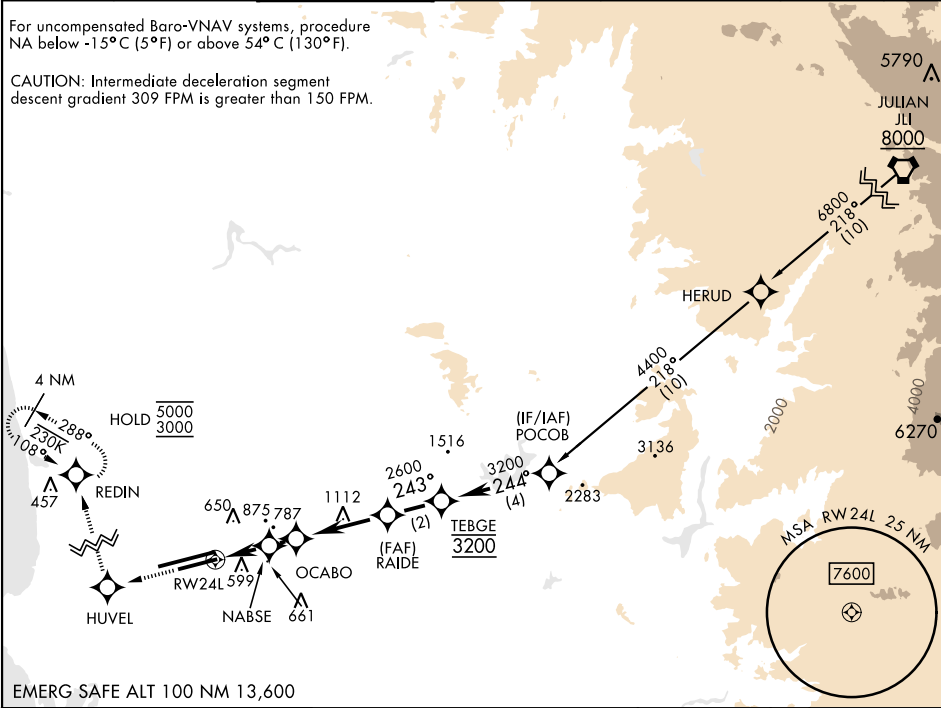

EMERG SAFE ALT 100 NM 13,600

3000 ↑ HUVEL		REDIN tr 288°		ELEV 477	TDZE 477
POCOB 4400 244°		TEBGE 3200 243°		OCABO 1460 1140	
NABSE 1460 1140		RAIDE 2600 243°		GP 3.00° TCH 46	
RW24L 2 NM		1 NM		3.5 NM	
CATEGORY	A	B	C	D	
LPV DA	677-¾		200	(200-¾)	
LNAV/VNAV DA	730-¾ 253 (300-¾)	741-7/8 264 (300-7/8)	749-7/8 272 (300-7/8)	760-7/8 283 (300-7/8)	
LNAV MDA	960-1	483 (500-1)	960-1 3/8	483 (500-1 1/8)	
CIRCLING	960-1	483 (500-1)	483 (500-1 1/2)	703 (800-2 1/4)	
SAN DIEGO, CALIFORNIA		32°52'N-117°09'W		MIRAMAR MCAS (JOE FOSS FLD) (KNKX)	
Amtd 4 27JAN22				RNAV (GPS) RWY 24L	

