


LOC I-MSS 108.7	APP CRS 045°	Rwy Ldg TDZE Apt Elev
		5601 205 221

ILS or LOC RWY 5

MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.		MISSED APPROACH: Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.
⚠ NA Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-ILS 5 DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.		

ASOS 128.075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

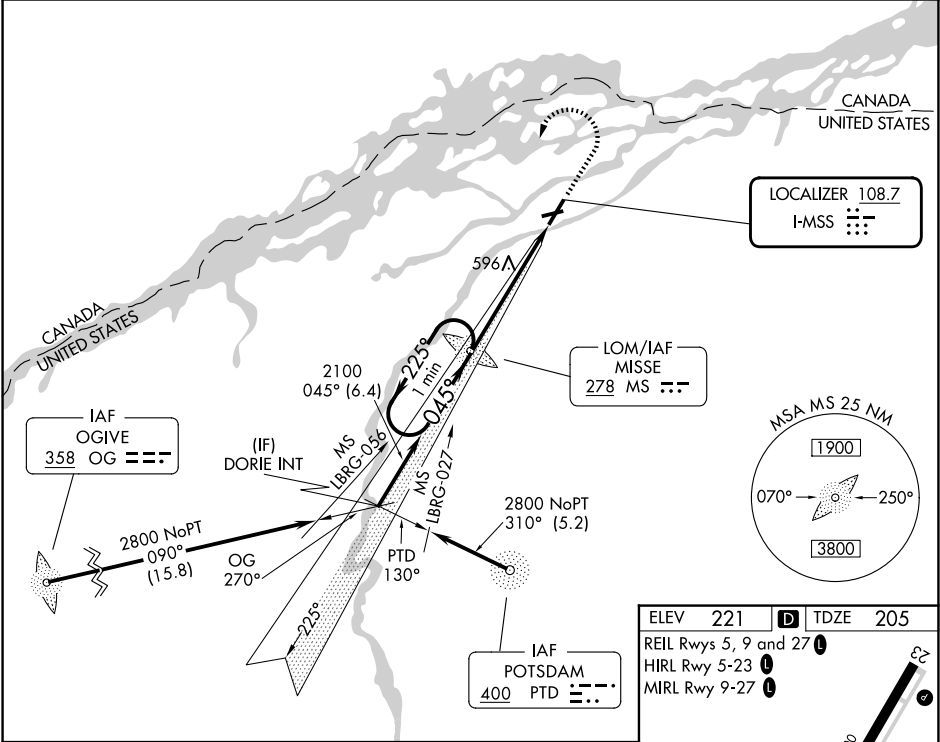

One Minute Holding Pattern		MISSE LOM	1200	2300	MS
2300 ← 225° 045° →		1994			
GS 3.00° TCH 54		2100			
		5.4 NM			
CATEGORY	A	B	C	D	
S-ILS 5		455-¾	250 (300-¾)		
S-LOC 5	800-1	595 (600-1)	800-1¾	595 (600-1¾)	
CIRCLING	800-1	579 (600-1)	880-1¾ 659 (700-1¾)	900-2¼ 679 (700-2¼)	

ELEV	221	D	TDZE	205	
REIL Rwy 5, 9 and 27 L					
HIRL Rwy 5-23 L					
MIRL Rwy 9-27 L					
FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48