

WAAS
CH **70303**
W05A

APP CRS
045°

Rwy Ldg
TDZE **205**
Apt Elev **221**

RNAV (GPS) RWY 5

MASSENA INTL-RICHARDS FLD (MSS)

RNP APCH - GPS.


▼

▲

Circling Rwy 9, 23, 27 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use PTD altimeter setting: increase LPV DA to 528 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 933 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct HODSA and on track 135° to HINED and hold.

ASOS 128,075	BOSTON CENTER 135.25 377.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

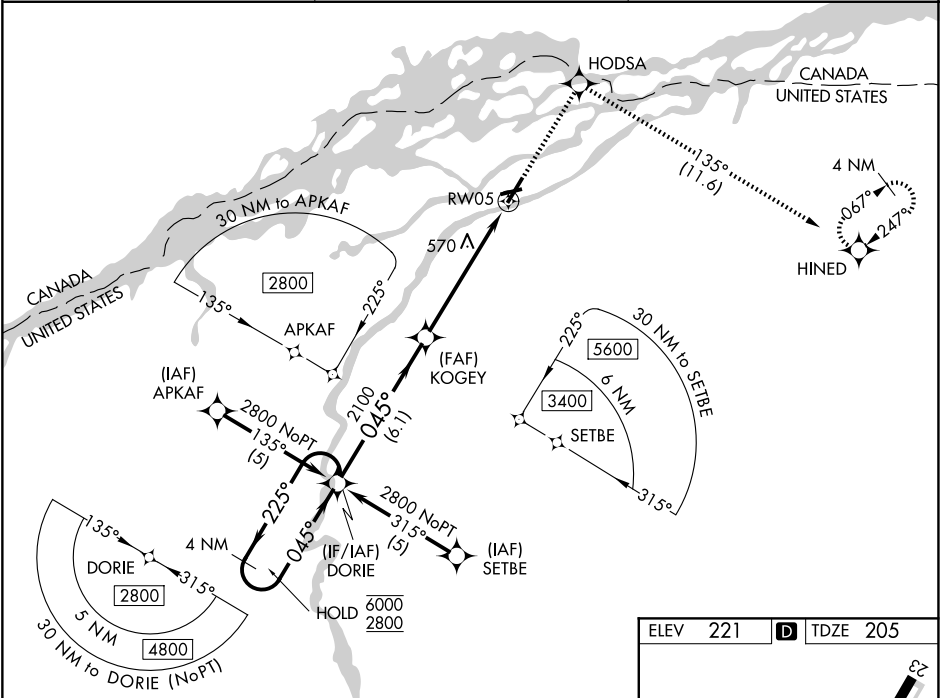

4 NM Holding Pattern

DORIE

3000

HODSA

tr 135°

HINED

GP 3.00°
TCH 54

6.1 NM

3.8 NM

1.9 NM

CATEGORY	A	B	C	D
LPV DA		455-3¼	250 (300-¾)	
LNAV/VNAV DA		860-1⅞	655 (700-1⅞)	
LNAV MDA	860-1	655 (700-1)	860-1⅞	655 (700-1⅞)
CIRCLING	860-1	639 (700-1)	880-1⅞	900-2¼

