


VORTAC ENE	APP CRS	Rwy Idg	6001
117.1	261°	TDZE	235
Chan 118		Apt Elev	244

VOR RWY 25
SANFORD SEACOAST RGNL (SFM)

Inoperative table does not apply to S-25 Cats A/B. For inoperative ODALS, increase S-25 Cats C/D visibility to 1 1/8. When local altimeter setting not received, use Rochester, NH altimeter setting increase all MDA 40 feet, S-25 Cats C/D visibility 1/8 SM, and Circling Cat C visibility 1/4 SM; for inop ODALS, increase S-25 Cats C/D visibility to 1 1/8. Rwy 25 helicopter visibility reduction below 3/4 SM NA.			ODALS 	MISSED APPROACH: Climb to 800 then climbing left turn to 2000 direct ENE VOR/DME and hold.
AWOS-3PT 120.025	PORTLAND APP CON ★ 119.75 269.35	CLNC DEL 121.725	UNICOM 123.075 (CTAF)	

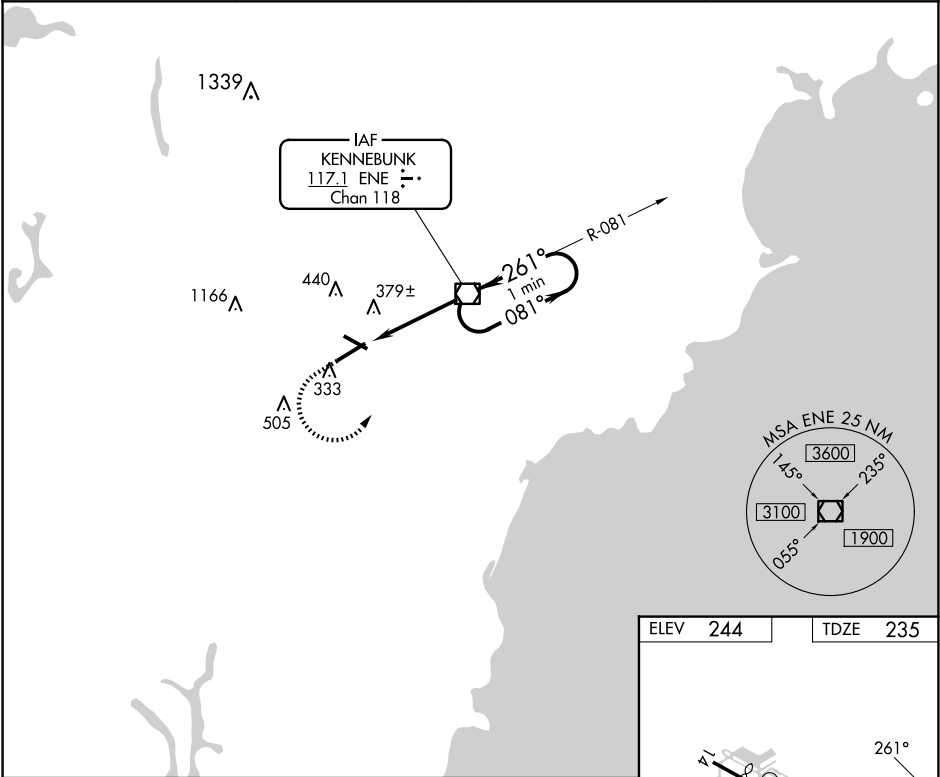

800	2000	ENE	One Minute Holding Pattern	
		ENE VOR/DME		
		081°	2000	
		261°		
CATEGORY	A	B	C	D
S-25	640-1 405 (400-1)			
CIRCLING	760-1 516 (600-1)		1180-2 3/4 936 (1000-2 3/4)	1240-3 996 (1000-3)

ELEV	244	TDZE	235
REIL Rwy 7			
HIRL Rwy 7-25			
MIRL Rwy 14-32			
FAF to MAP 4.2 NM			
Knots	60	90	120 150 180
Min:Sec	4:12	2:48	2:06 1:41 1:24

NE-1, 27 NOV 2025 to 25 DEC 2025

NE-1, 27 NOV 2025 to 25 DEC 2025